




...Keeps You Moving

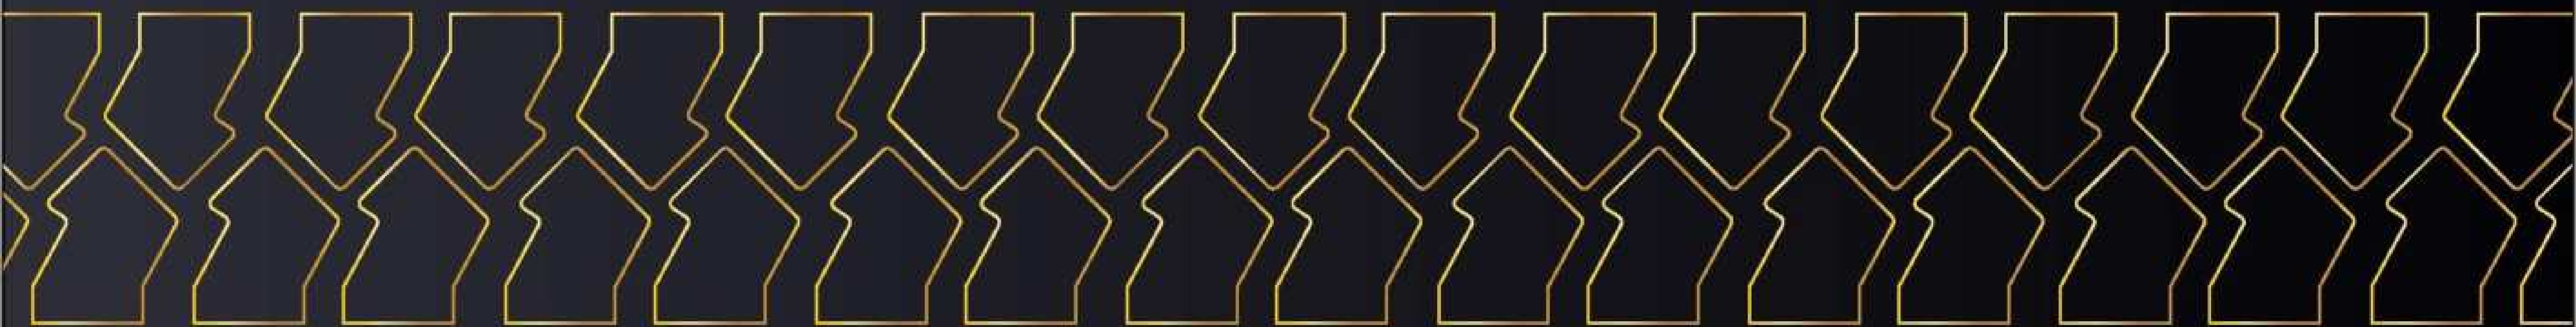

2023

PRODUCT CATALOGUE

Profile

SPEEDWAYS TYRES is a part of the well-known 'Speedways Group' of companies in India. Established in 1984, our presence today spans over 90 countries worldwide. We are leading manufacturer of Farm Radial, Agriculture Industrial, OTR, Two / Three Wheeler Tyres, Tubes & Flaps. We also specialize in Pre-Cured & Conventional Tread Rubber.

SPEEDWAYS located in the industrial town of Jalandhar, Punjab is having state-of-the-art manufacturing facility. The Tyres manufactured in this facility are supplied to major original equipment manufacturers (OEM's) in India, North America, Europe & Africa.

We have been awarded the "CAPEXIL Export Award" for a record eighth year in succession in recognition of our outstanding performance in exports. Built on the foundation of honesty, trust, lawful operation and scientific development, we strive to deliver maximum value to our customers & stakeholders. Over the years, we have established a distinct culture in the company through various HR policies. With an emphasis on TQM, continuous efforts are being undertaken at our R&D centre to improve product quality, manufacturing & production systems. Our target has always been to delight our customers with the best products and services.

TEAM

We are young, dynamic and motivated professionals who are passionate and committed to achieve better results for our customers. We employ a customized engagement process to understand and meet the customer's requirement. Our team members interact at all levels to forge a strong relationship to sustain the success achieved.

SKILL & EXPERIENCE

Our team at **SPEEDWAYS TYRES** specializes in handling & solving complex problems that includes long term strategic planning, business process design and setting up a control framework. We are proud to have a legacy of succeeding in adverse and testing business conditions.

KEY GROWTH DRIVERS:

Technology
Cost of Production & Manufacturing efficiency
Receptive to customer feedback

WHAT WE BELIEVE IN?

Thoughts which start from the customer
Service, Quality & Customer Satisfaction
Process excellence
Relationship with all stakeholders
Application development
On-time delivery

Our endeavour is to work aggressively, challenge traditional mind-set so as to provoke our team to be innovate in their thoughts, actions & delivery.

COLLABORATIVE STRATEGY

Synergy with the customer at:
Product level
Market level
Organizational level



Index

AGRICULTURE TYRES

Radial Tractor Tyres - 65 Series	01
Radial Harvester Tyres	01
Radial Tractor Tyres - 70 & 75 Series	02
Radial Tractor Tyres - 80 & 85 Series	03
Radial Flotation Tyres	04
Radial Row Crop Tyres - 90 & 95 Series	05
Radial Irrigation Drive	06
Irrigation Tyres	06
Bias Tractor Rear Tyres	07
Bias Tractor Front Tyres	09
Bias Row Crop Farming Tyres	10
All Terrain Traction Tyres	11
Farming & Highway Service Implement Tyres	12
Drive Wheel Tyres	12
Agricultural Implement Tyres	13
Mountain Tyres	14
Harvester Tyres	15
Flotation Implement Tyres	15
Forestry Tyres	16
Lawn & Garden Tyres	19
Golf Cart Tyres	19
Sports Ground Tyres	19

INDUSTRIAL TYRES

Radial Industrial Tyres	21
Radial OTR Tyres	21
Earthmover Tyres	22
Grader Tyres	22
Radial Skid Steer Tyres	23
Skid Steer Tyres	23
Drive Wheel (R-3) Tyres	25
Excavator Tyres	25
Industrial Tyres	25
Industrial Tractor Tyres	26
Multi Purpose Truck (MPT)	27
Compactor Tyres	28
Industrial Forklift Tyres	28

TRUCK & LIGHT TRUCK TYRES

29

TRAILER & VINTAGE VEHICLE TYRES

31

ELECTRIC VEHICLE TYRES

32

MILITARY JEEP 4X4 TYRES

33

THREE WHEELER TYRES

33

TWO WHEELER TYRES

34

BUTYL TUBES & FLAPS

35

ISO 9001:2015

IATF 2016

DOT

Certificate of Registration

SPEEDWAYS RUBBER COMPANY

SUCHI PIND BYE PASS, G.T. ROAD, JALANDHAR-144009, PUNJAB, INDIA

has been assessed and Certified by Otabu Certification Pvt. Ltd. as meeting the requirements of:

ISO 9001:2015

Quality Management System

For the following scope of activities:

MANUFACTURER OF AUTOMOTIVE BIAS TYRES, BUTYL RUBBER INNER TUBES, FLAPS (EPDM & NATURAL) & PRECURED TREAD RUBBER

Issue No : 01
Date of Certification: 10 June 2021
1st Surveillance Due: 09 June 2022

Revision No () : NA
2nd Surveillance Due: 09 June 2024
Certificate Expiry: 09 June 2024

Certificate No:- 0610Q107121
To Verify this Certificate please visit at www.otabucert.com

Dr. Anita Gupta
(Managing Director)

*Validity of the certificate is subject to successful completion of surveillance audit on or before due date (in case surveillance audit is not allowed to be conducted, this certificate shall be suspended/withdrawn). This Certificate of Registration remains the Property of Otabu Certification Pvt. Ltd. and shall be returned immediately upon request.

Otabu Certification Pvt. Ltd., 82-B (Ground Floor), Pheroz Nagar, Udhampur, Jammu (India) - 182110

Email:- info@otabucert.com website:- www.otabucert.com

Certificate

This is to Certify that Technical Specification of the

SPEEDWAYS RUBBER COMPANY

Suchi Pind Bye Pass, G.T. Road, Jalandhar- 144009, Punjab, India

Has been assessed and found to be in accordance with the requirements of Management system standard :

IATF 16949:2016

This Certificate is valid for the following scope

Manufacturer of Automotive Bias Tyres, Butyl Rubber Inner Tubes, FLAPS (EPDM & Natural) & Precured Tread Rubber

Certificate No : IATF-MMXXI-6-8959
NACE : DG-24.36, G-52.46
Issue Date : 23-JUNE-2021
Valid Until : 22-JUNE-2024
Surveillance 1 : 01-MAY-2022
Surveillance 2 : 01-MAY-2023

Adpanghal
Authorised Signatory
WRG Certification

This certificate remains the property of American International Accreditation Organization-Bureau of Accredited Registrars, (USA)

Validity of the certificate is subject to successful completion of surveillance audits. Further clarification regarding the scope of this certificate and the applicability of standards may be obtained by consulting the WRG Certification Organization, P.O. Box 10000, Dallas, TX 75210, USA. E-mail: info@wrqcert.com; website: www.wrqcert.com; www.aiaa-bar.com

U.S. Department of Transportation
National Highway Traffic Safety Administration

OCT 23 2020

1020 New Jersey Avenue SE
Washington, DC 20020

Dr. Kar Singh
Tech. Head
Speedways Rubber Company
Suchi Pind, Bye Pass, G.T. Road
Jalandhar - 144009
Punjab, India

Re: Agency Response to 49 CFR Part 551, Subpart D Submission Designation of Agent For Service of Process.

Dear Mr. Singh:

This is in response to your submission, which we received on September 25, 2012, under our regulation governing designation by a foreign manufacturer of a U.S. agent for service of process (49 C.F.R. Part 551, Subpart D).

Speedways Rubber Company's designation of:

649 Meadow Hill Road
Fort Worth, TX 76108
(305) 367-1254

as its U.S. agent for service of process complies with the requirements of our agent regulation and will be placed in our registry of agents.

Sincerely,

Jim Kim
Attorney-Advisor
NHTSA Office of the Chief Counsel

cc: Brian K. Hubbard
Director
649 Meadow Hill Road
Fort Worth, TX 76108

e-mark

e-mark

BIS

Certificado N°: / Certificate No: 49182002

CERTIFICADO CONFORMIDAD PRODUCCIÓN

CONFORMITY PRODUCTION CERTIFICATE

El presente certificado acredita que: / The following certificate attests that:

SPEEDWAYS RUBBER COMPANY
Suchi Pind Bye Pass, G.T. Road
144009, Jalandhar, PUNJAB (INDIA)

dispone de un sistema de gestión de calidad y de los procedimientos y planes de conformidad de la producción adecuados para garantizar el cumplimiento con los requisitos del: / Has a quality management system and the conformity of production procedures and plans in compliance with the requirements of:

Anexo 1 del acuerdo ECE/TRANS/505/Rev.3
Schedule 1 of the Agreement ECE/TRANS/505/Rev.3

Alcance: / Scope: Ver Anexo 1 / See Annex 1

El certificado se emite como consecuencia del expediente 49182002, correspondiente a la auditoría realizada el 20 de febrero de 2020, válido para los números de homologación concedidos por el Ministerio de Industria, Comercio y Turismo. / The certificate is issued as a result of the 49182002 file, referred to the audit carried out on the 20th of February 2020, valid for the approval numbers granted by the Ministry of Industry, Commerce and Tourism.

Fecha de emisión: / 1st Issue Date: 17.04.2018 / 2018.04.17
Válido hasta: / Valid until: 17.04.2022 / 2022.04.17

D. José Mª Martínez-Vel Peñafiel
Directivo FV

FUNDACIÓN PARA EL FOMENTO DE LA INNOVACIÓN INDUSTRIAL
C/ Jose Solano Álvarez, 2, 28002 Madrid - CP: 28002-0002

Conformity of Production Compliance Statement

VCA as the Type Approval Authority for the United Kingdom has conducted an assessment of the quality systems and the relevant control plans in order to verify Compliance with Schedule 1 of Revision 3 of the E/CE/TRANS/505 Agreement done at Geneva on 20 March 1958 The assessment was conducted in accordance with the requirements of this Regulation

This Compliance Statement is issued to:

Speedways Rubber Company
Suchi Pind Bye Pass, G.T. Road ,
Jalandhar - 144009 Punjab , India

Assembly sites: See overleaf
Clearance Scope: See attachment
Component Range: Tyres

Registration Number: VCAIND/20/000292/A

Date of issue: 13 January 2021
Date of expiry: 12 January 2023

Signed for and on behalf of VCA

Andrew Wallace
Head of Overseas Partner Operations
VCA
By authority of the Chief Executive

Planned date of monitoring visit: 3 Months Prior to Expiry of Clearance.

There may be additional surveillance visits carried out during the validation period

Page 1 of 3 Jan-21

भारतीय मानक ब्यूरो
BUREAU OF INDIAN STANDARDS

Address Plot No. 4-A,
Sector 27-III,
Medina Marg-Chandigarh (160019)
Phone: (0172-2636072)
Fax: (0172-2636072)
E-Mail: mail@bis.org.in
Web: <http://www.bis.org.in>

Chandigarh Branch Office-I,
Northern Regional Office, Bureau
of Indian Standards

साइसेस संख्या सी एम/एल- 9821489
ATTACHMENT TO LICENCE NO. CML/ 9821489

सी एम/एल संख्या CML/NO	साइसेसधारी का पता सहित नाम NAME OF THE LICENSEE WITH THE ADDRESS	उत्पाद का नाम NAME OF THE PRODUCT	भा मा संख्या IS NO.
9821489	Speedways Rubber Company Suchi Pind Road, G. T. Road,bye Pass, Jalandhar City, Punjab- 144009	Automotive vehicles - Pneumatic tyres for two and three-wheeled motor vehicles	IS 15627 : 2005

पुनःकरण संख्या 23 दिनांक
ENDORSEMENT NO. 23 DATED 21-10-2020

साइसेस 31/10/2020 तक वैध था,
Whereas, the licence was valid upto 31/10/2020,

अब, नवीनीकरण के परिणामस्वरूप पुनःकरण संख्या 22 अनुसूची में दिये गये साइसेस की वैधता को पहली नवंबर को हजार बीस से इकहत्तर अक्टूबर को हजार इकहत्तर तक बढ़ा दिया गया है।

Now, consequent upon renewal, the validity of the licence given in schedule of the Endorsement No 22 has been extended from First November Two Thousand Twenty to Thirty First October Two Thousand Twenty One.

साइसेस की अन्य शर्तें व शर्तें पचासवें हैं।
Other terms and conditions of Licence remain the same.

अधिकृत अधिकारी के हस्ताक्षर

AGRICULTURE

TYRES



RADIAL TRACTOR TYRES

65 SERIES

- Radial tyre with balanced characteristics for a wide range of applications both in the field and on the road.
- Larger ground contact patch makes the tyre well suited for handling grassland.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper Tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.



SR-666

SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch			mm	32nds	kg	lbs				kg	lbs
						40 kmph / 25 mph MAX LOAD					50 kmph / 30 mph MAX LOAD												
440/65R-24 135 D/138 A8	SR-666	W 14L	W 13 W 15L	TL	442	17.4	1181	46.5	538	21.2	3546	139.6	46	57	2360	5195	2180	4800	2.4	35	135	D/65kmph	D/40 mph
440/65R-28 138 D/141 A8	SR-666	W 14L	W 13 W 15L	TL	442	17.4	1283	50.5	589	23.2	3879	152.7	46	57	2575	5665	2360	5195	2.4	35	138	D/65kmph	D/40 mph
480/65R-28 142 D/145 A8	SR-666	W 15L	W 14L	TL	480	18.9	1283	52.6	610	24.0	4059	159.8	47	59	2900	6380	2650	5830	2.4	35	142	D/65kmph	D/40 mph
600/65R-38 159 D/162 A8	SR-666	DW 20B	W 18L	TL	612	24.1	1811	71.3	790	31.1	5248	206.6	55	69	4750	10450	4375	9625	2.4	35	159	D/65kmph	D/40 mph
650/65R-38 163 D/166 A8	SR-666	DW 20B	W 9	TL	643	25.3	1808	71.2	830	32.7	5479	215.7	59	74	5600	12320	4875	10725	2.4	35	163	D/65kmph	D/40 mph

RADIAL HARVESTER TYRES

- Suitable for all kinds of Harvesting Machines
- Design to deliver power to the ground
- Extra deep tread
- Low soil compaction and excellent traction in the field



SR-65

SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch			mm	32nds	kg	lbs				kg	lbs
						40 kmph / 25 mph MAX LOAD					50 kmph / 30 mph MAX LOAD												
800/65R-32 30.5L-32 178 A8/175 B	SR-65	DW 27B	DW 25B DW 27B	TL	818	32.2	1854	73.0	838	33.0	5588	220.0	58	72	7500	16500	6900	15180	3.2	46	175	B/40kmph	B/25 mph

RADIAL TRACTOR TYRES

70 & 75 SERIES

- Radial tyre with balanced characteristics for a wide range of applications both in the field and on the road.
- Larger ground contact patch makes the tyre well suited for handling grassland.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper Tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
200/70R-16 94 A8/B	SR-777	W 6	-	TL	198	7.8	686	27.0	312	12.3	2057	81.0	27	33	670	1475	670	1475	2.4	35	94	B/50 kmph	B/30 mph
240/70R-16 104 A8/B	SR-777	W 8	W 8L W 9L	TL	241	9.5	742	29.2	335	13.2	2225	87.6	30	37	900	1980	900	1980	2.4	35	104	B/50 kmph	B/30 mph
260/70R-16 109 A8/B	SR-777	W 8	W 8L W 9L	TL	259	10.2	770	30.3	345	13.6	2309	90.9	31	38	1030	2265	1030	2265	2.4	35	109	B/50 kmph	B/30 mph
280/70R-16 112 A8/B	SR-777	W 9	W 8 W 8L W 10	TL	282	11.1	798	31.4	356	14.0	2370	93.3	32	40	1120	2465	1120	2465	2.4	35	112	B/50 kmph	B/30 mph
280/70R-18 114 A8/B	SR-777	W 9	W 8 W 10	TL	282	11.1	849	33.4	381	15.0	2547	100.3	32	40	1180	2595	1180	2595	2.4	35	114	B/50 kmph	B/30 mph
320/70R-20 123 A8/B	SR-777	W 10	W 9 W 11	TL	320	12.6	983	38.7	444	17.5	2964	116.7	33	42	1550	3410	1550	3410	2.4	35	123	B/50 kmph	B/30 mph
360/70R-20 129 A8/B	SR-777	W 11	W 10 W 12	TL	358	14.1	1041	41.0	470	18.5	3122	122.9	41	52	1850	4070	1850	4070	1.6	23	129	B/50 kmph	B/30 mph
320/70R-24 116A8/B	SR-777	W 10	W 9 W 11	TL	320	12.6	1095	43.1	503	19.8	3240	127.8	40	50	1250	2750	1250	2750	1.6	23	116	B/50 kmph	B/30 mph
360/70R-24 122 A8/B	SR-777	W 11	W 10 W 11	TL	358	14.1	1153	45.4	518	20.4	3454	136.0	41	52	1500	3300	1500	3300	1.6	23	122	B/50 kmph	B/30 mph
380/70R-24 125 A8/B	SR-777	W 12	W 11 W 13	TL	381	15.0	1191	46.9	538	21.2	3561	140.2	42	53	1650	3630	1650	3630	1.6	23	125	B/50 kmph	B/30 mph
420/70R-24 130 A8/B	SR-777	W 13	W 12 W 14 L	TL	419	16.5	1222	48.1	579	22.8	3561	144.9	44	55	1900	4180	1900	4180	1.6	23	130	B/50 kmph	B/30 mph
380/70R-28 127 A8/B	SR-777	W 12	W 11 W 13	TL	381	15.0	1293	50.9	587	23.1	3884	152.9	42	53	1750	3850	1750	3850	1.6	23	127	B/50 kmph	B/30 mph
420/70R-28 133 A8/B	SR-777	W 13	W 12 W 14	TL	419	16.5	1349	53.1	610	24.0	3988	157.0	46	58	2060	4540	2060	4540	1.6	23	133	B/50 kmph	B/30 mph
600/70R-30 152 A8/B	SR-777	DW 20B	DW 18L W 18L	TL	592	23.3	1603	63.1	711	28.0	4775	188.0	58	73	3550	7810	3550	7810	1.6	23	152	B/50 kmph	B/30 mph
400/75R-38 15.5R-38 140 A8/B	SR-888	W 14	W 14	TL	394	15.5	1570	62.0	730	29.0	4685	184.0	46	58	2500	5500	2500	5500	1.6	23	140	B/50 kmph	B/30 mph
710/70R-42 173 A8/B	SR-777	DW 23B	-	TL	716	28.2	2060	81.1	922	36.3	6175	243.1	59	74	6500	14300	6500	14300	2.4	35	173	B/50 kmph	B/30 mph

RADIAL TRACTOR TYRES

80 & 85 SERIES

- Radial tyre with balanced characteristics for a wide range of applications both in the field and on the road.
- Larger ground contact patch makes the tyre well suited for handling grassland.
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper Tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch			mm	32nds	kg	lbs				kg	lbs
					mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lbs	kg	lbs	bar	psi	kmph
280/85R-20 11.2R-20 112 A8/B	SR-888	W 10	W 9	TL	292	11.5	983	38.7	442	17.4	2951	116.2	38	48	1120	2464	1120	2464	1.6	23	112	B/50 kmph	B/30 mph
280/85R-24 11.2R-24 115 A8/B	SR-888	W 10	W 9	TL	292	11.5	1087	42.8	508	20.0	3226	127.0	40	50	1215	2675	1215	2675	1.6	23	115	B/50 kmph	B/30 mph
320/85R-24 12.4R-24 122 A8/B	SR-888	W 11	W 9 W 10	TL	330	13.0	1153	45.4	518	20.4	3424	134.8	42	53	1500	3300	1500	3300	1.6	23	122	B/50 kmph	B/30 mph
340/85R-24 13.6R-24 125 A8/B	SR-888	W 12	W 11	TL	343	13.5	1188	46.8	533	21.0	3531	139.0	43	54	1650	3630	1650	3630	1.6	23	125	B/50 kmph	B/30 mph
380/85R-24 14.9R-24 131 A8/B	SR-888	W 12	W 11 W 13	TL	381	15.0	1255	49.4	559	22.0	3706	145.9	44	55	1950	4290	1950	4290	1.6	23	131	B/50 kmph	B/30 mph
320/85R-28 12.4R-28 124 A8/B	SR-888	W 11	W 9 W 10	TL	320	12.6	1255	49.4	559	22.0	3734	147.0	41	52	1600	3520	1600	3520	1.6	23	124	B/50 kmph	B/30 mph
340/85R-28 13.6R-28 127 A8/B	SR-888	W 12	W 11	TL	353	13.9	1288	50.7	584	23.0	3835	151.0	41	52	1750	3850	1750	3850	1.6	23	127	B/50 kmph	B/30 mph
380/85R-28 14.9R-28 133 A8/B	SR-888	W 12	W 11 W 13	TL	381	15.0	1356	53.4	607	23.9	4016	158.1	44	55	2060	4535	2060	4535	1.6	23	133	B/50 kmph	B/30 mph
420/85R-28 16.9R-28 139 A8/B	SR-888	W 15	W 13 W 14	TL	419	16.5	1425	56.1	635	25.0	4242	167.0	48	60	2430	5345	2430	5345	1.6	23	139	B/50 kmph	B/30 mph
380/85R-30 14.9R-30 135 A8/B	SR-888	W 12	W 11 W 13	TL	381	15.0	1407	55.4	630	24.8	4153	163.5	44	55	2180	4796	2180	4796	1.6	23	135	B/50 kmph	B/30 mph
420/85R-30 16.9R-30 140 A8/B	SR-888	W 15	W 13 W 14	TL	419	16.5	1476	58.1	660	26.0	4394	173.0	44	55	2500	5500	2500	5500	1.6	23	140	B/50 kmph	B/30 mph
380/85R-34 14.9R-34 137 A8/B	SR-888	W 12	W 11 W 13	TL	381	15.0	1514	59.6	686	27.0	4470	176.0	44	55	2300	5060	2300	5060	1.6	23	137	B/50 kmph	B/30 mph
420/85R-34 16.9R-34 142 A8/B	SR-888	W 15	W 13 W 14	TL	419	16.5	1577	62.1	711	28.0	4674	184.0	48	60	2650	5830	2650	5830	1.6	23	142	B/50 kmph	B/30 mph
460/85R-34 18.4R-34 147 A8/B	SR-888	W 16	W 14 W 15	TL	475	18.7	1646	64.8	737	29.0	4851	191.0	49	62	3075	6765	3075	6765	1.6	23	147	B/50 kmph	B/30 mph

SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch			40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD					kg	lbs
420/85R-38 16.9R-38 144 A8/B	SR-888	W 15	W 13 W 14	TL	419	16.5	1679	66.1	762	30.0	5004	197.0	51	64	2800	6160	2800	6160	1.6	23	144	B/50 kmph	B/30 mph
460/85R-38 18.4R-38 149 A8/B	SR-888	W 16	W 14 W 15	TL	455	17.9	1748	68.8	787	31.0	5156	203.0	54	68	3250	7150	3250	7150	1.6	23	149	B/50 kmph	B/30 mph
520/85R-38 20.8R-38 155 A8/B	SR-888	DW 16	DW 18	TL	516	20.3	1849	72.8	813	32.0	5410	213.0	58	73	3875	8525	3875	8525	1.6	23	155	B/50 kmph	B/30 mph
480/80R-42 18.4R-42 151 A8/B	SR-888	W 16	DW 16	TL	480	18.9	1836	72.3	838	33.0	5461	215.0	53	67	3450	7590	3450	7590	1.6	23	151	B/50 kmph	B/30 mph
520/85R-42 20.8R-42 157 A8/B	SR-888	W 16	DW 16	TL	516	20.3	1951	76.8	859	33.8	5735	225.8	57	72	4125	9075	4125	9075	1.6	23	157	B/50 kmph	B/30 mph
480/80R-46 18.4R-46 158 A8/B	SR-888	W 16	DW 16	TL	480	18.9	1933	76.1	889	35.0	5791	228.0	51	64	4250	9350	4250	9350	2.4	35	158	B/50 kmph	B/30 mph
340/85R-48 13.6R-48 152 A8/B	SR-888	W 12	W 11	TL	353	13.9	1798	70.8	838	33.0	5385	212.0	43	54	3550	7810	3550	7810	4.1	58	152	B/50 Kmph	B/30 mph

RADIAL FLOTATION TYRES

- Flotation Radial Tyres provides soil protection
- Non directional lugs pattern enables mobility in the field
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper Tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch			40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD					kg	lbs
560/60R-22.5 161 D/172 A8	FR-60	AG 16	15 16 17	TL	503	19.8	1171	46.1	521	20.5	3592	141.4	30	37	6300	13860	4625	10175	2.4	35	161	D/65 kmph	D/40 mph
600/50R-22.5 159 D/170 A8	FR-60	AG 20	-	TL	612	24.1	1171	46.1	521	20.5	3592	141.4	31	39	6000	13200	4375	9625	2.4	35	159	D/65 kmph	D/40 mph
600/55R-26.5 165 D/176 A8	FR-60	AG 20	-	TL	612	24.1	1333	52.5	597	23.5	4092	161.1	31	39	7100	15620	5150	11330	2.4	35	165	D/65 kmph	D/40 mph

RADIAL ROW CROP TYRES

90 & 95 SERIES

- Round shoulders minimize influence on the crop roots.
- Optimum lug shape & angle provide an excellent grip.
- Long service life thanks to the use of a wear resistant tread compound.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch			mm	32nds	kg	lbs				kg	lbs
						40 kmph / 25 mph MAX LOAD					50 kmph / 30 mph MAX LOAD												
210/95R-16 7.50R-16 106 A8/B	RC-999	W 6.5	W 6 W 7	TL	208	8.2	805	31.7	361	14.2	2416	95.1	27	34	950	2090	950	2090	2.4	35	106	B/50 kmph	B/30 mph
210/95R-32 8.3R-32 120 A8/B	RC-999	W 8	W 7	TL	214	8.4	1213	47.8	559	22.0	3658	144.0	30	38	1400	3080	1400	3080	2.4	35	120	B/50 kmph	B/30 mph
230/95R-32 9.5R-32 128 A8/B	RC-999	W 8	W 7	TL	229	9.0	1251	49.3	584	23.0	3759	148.0	30	38	1800	3960	1800	3960	4.0	58	128	B/50 kmph	B/30 mph
270/95R-32 11.2R-32 136 A8/B	RC-999	W 8	W 9 W 10	TL	275	10.8	1327	52.2	609	24.0	4039	159.0	31	39	2240	4928	2240	4928	4.0	58	136	B/50 kmph	B/30 mph
230/95R-36 9.5R-36 130 A8/B	RC-999	W 8	W 7	TL	229	9.0	1352	53.2	609	24.0	4064	160.0	42	53	1900	4180	1900	4180	4.0	58	130	B/50 kmph	B/30 mph
270/95R-36 11.2R-36 140 A8/B	RC-95	W 9	W 8	TL	229	9.0	1425	56.1	663	26.1	4359	171.6	35	44	2430	5346	2430	5346	4.0	58	139	B/50 kmph	B/30 mph
270/95R-38 11.2R-38 140 A8/B	RC-999	W 8	W 9 W 10	TL	264	10.3	1479	58.2	686	27.0	4445	175.0	35	44	2505	5511	2505	5511	4.0	58	140	B/50 kmph	B/30 mph
230/95R-44 9.5 R-44 134 A8/B	RC-999	W 8	W 7	TL	228	9.0	1556	61.3	737	29.0	4699	185.0	32	40	2120	4664	2120	4664	4.0	58	134	B/50 kmph	B/30 mph
270/95R-44 11.2R-44 134 A8/B	RC-999	W 8	W 9 W 10	TL	275	10.8	1632	64.3	762	30.0	4902	193.0	32	40	2650	5830	2650	5830	4.0	58	142	B/50 kmph	B/30 mph
300/95R-46 12.4R-46 148 A8/B	RC-999	W 8	W 9 W 11	TL	305	12.0	1737	68.3	813	32.0	5207	205.0	45	57	3150	6930	3150	6930	4.0	58	148	B/50 kmph	B/30 mph
380/95R-46 14.9R-46 148 A8/B	UNDER DEVELOPMENT																						
230/95R-48 9.5R-48 136 A8/B	RC-999	W 8	W 7	TL	228	9.0	1657	65.2	787	30.1	4978	196.0	32	40	2240	4928	2240	4928	4.0	58	136	B/50 kmph	B/30 mph
270/95R-48 11.2R-48 144 A8/B	RC-999	W 8	W 9 W 10	TL	275	10.8	1733	68.2	812	32.0	5257	207.0	33	41	2800	6160	2800	6160	4.0	58	144	B/50 kmph	B/30 mph
300/95R-52 12.4R-52 151 A8/B	RC-999	W 10	W 9 W 11	TL	305	12	1892	75.0	889	35.0	5664	223.0	44	55	3450	7590	3450	7590	4.0	58	151	B/50 kmph	B/30 mph

RADIAL IRRIGATION DRIVE TYRES

85/95 SERIES

- Designed for irrigation service with minimal soil compaction & excellent wear.
- Long service life thanks to the use of a wear resistant tread compound.



AGRI ND-888



AGRI ND-95

SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED	
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40 kmph / 25 mph MAX LOAD		50 kmph / 30 mph MAX LOAD		bar	psi		kmph	mph
															kg	lbs	kg	lbs					
280/85R-24 11.2R-24	AGRI ND-888	W 10	W 9	TL	292	11.5	1087	42.8	492	19.4	3292	129.6	36	45	1215	2673	1215	2673	1.6	23	115/A8		
380/85R-24 14.9R-24	AGRI ND-888	W 12	W 11 W 13	TL	380	15.0	1262	49.7	554	21.8	3826	150.6	36	45	1950	4290	1950	4290	1.6	23	131/A8	B/50 kmph	B/30 mph
270/95R-38 11.2R-38	AGRI ND-95	W 9	W 8 W 10	TL	275	10.9	1490	58.7	697	27.5	4517	177.9	36	45	2500	5500	2500	5500	1.6	23	140/A8		

IRRIGATION TYRES

TYRES

- Designed for irrigation service with minimal soil compaction & excellent wear.
- Long service life thanks to the use of a wear resistant tread compound.



IR-007



IR-005



AGRI ND-5



IR-009

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED										
			inch		mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph									
11.2-24	AGRI ND-5	4											25	31	825	1815	1.3	18	101											
	IR-007	6	10.0	TT/TL	284	11.2	1105	43.5	508	20.0	3200	126.0	24	30	1060	2330	1.8	26	110	A6/30 kmph	A6/20 mph									
	IR-009	8											24	30	1120	2465	2.1	30	112											
12.4-24	IR-005	6	11.0	TT/TL	315	12.4	1170	46.1	508	20.0	3200	126.0	26	33	1215	2673	1.6	23	115	A6/30 kmph	A6/20 mph									
		8																												
14.9-24	AGRI ND-5	4											32	40	1250	2750	1.3	18	116											
	IR-005	6	13.0	TT/TL	378	14.9	1265	49.8	584	23.0	3658	144.0	27	34	1550	3410	1.4	20	123	A6/30 kmph	A6/20 mph									
	IR-007	8																												
	IR-009	8																					39	49	1800	3960	1.8	26	128	
11.2-38	AGRI ND-5	4											29	37	1030	2266	1.4	20	109											
	IR-007	6	10.0	TT/TL	284	11.2	1463	57.6	693	27.3	4343	171.0	27	34	1285	2827	1.8	26	117	A6/30 kmph	A6/20 mph									
	IR-009	8											27	34	1550	3410	2.1	30	123											

BIAS TRACTOR REAR TYRES

- Deep Tread and excellent tread wear and durability.
- Designed to deliver power to the ground.
- Design offers maximum cleaning and sidehill slip resistance.



GRIPKING



GRIPKING PLUS



GRIPKING HD



POWERLUG



GK-111



FIELDKING



KRISHIKING



TR-21



PK-318 HD



PK-319

BIAS TRACTOR FRONT TYRES

- Penetrates deep into soil for maximum steering control & minimal lateral side-slip because of its high center rib.
- Best for handling heavy loads on hard-packed surfaces.
- Offers excellent load distribution and flotation.



F-2



SW-101



SW-201



SW-99



TF-2000









SW-200



DUAL RIB PLANTER

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	22nds	kg	lbs	bar	psi		kmph	mph
3.50-6	F-2	4	2.5	TT	99	3.9	343	13.5	214	8.4	1341	52.8	8	10	165	363	2.7	38	45	A8/40 kmph	A8/25 mph
3.50-8	F-2	4	2.5	TT	101	4.0	371	14.6	218	8.6	1390	54.7	9	11	185	407	2.7	38	49		
4.00-8	F-2	4	3.0	TT	112	4.4	430	16.9	224	8.8	1430	56.3	9	11	224	493	2.8	40	56		
4.00-12	F-2	4	3.0	TT	112	4.4	530	20.8	254	10.0	1626	64.0	10	13	300	660	2.8	40	66	A6/30 kmph	A6/20 mph
5.00-12	SW-99	6			140	5.5	580	22.8	270	10.6	1736	68.3	12	15	265	583	3.2	45	62		
4.00-15	F-2	4	3.0	TT	112	4.4	610	24.0	295	11.6	1854	73.0	8	10	307	675	3.1	44	67	A8/40 kmph	A8/25 mph
	SW-201												12	15	475	1045	3.7	54	82		
5.00-15	F-2	6	4.0	TT	140	5.5	655	25.8	305	12.0	1956	77.0	12	15	475	1045	3.7	54	82	A8/40 kmph	A8/25 mph
	SW-201	4	3.0										14	18	475	1045	3.7	54	82		
	SW-99	6	4.0										14	18	475	1045	3.7	54	82		
4.00-16	F-2	4	3.0	TT	112	4.4	640	25.2	305	12.0	1956	77.0	10	13	325	715	3.3	48	69	A6/30 kmph	A6/20 mph
	SW-201												10	13	365	803	3.3	48	73		
4.50-16	F-2	6	3.0	TT	122	4.8	665	26.2	305	12.0	1956	77.0	10	13	365	803	3.3	48	73	A6/30 kmph	A6/20 mph
	SW-201												10	13	365	803	3.3	48	73		
5.00-16	F-2	6	4.0	TT	140	5.5	680	26.8	330	13.0	2032	80.0	10	13	400	880	3.3	48	76	A6/30 kmph	A6/20 mph
	SW-201												10	13	400	880	3.3	48	76		
5.50-16	F-2	6	4.0	TT	150	5.9	710	27.9	330	13.0	2083	82.0	12	15	530	1165	3.3	48	84	A6/30 kmph	A6/20 mph
	SW-201												12	15	530	1165	3.6	52	86		
	SW-99												12	15	530	1165	3.8	54	78		
6.00-16	F-2	8	4.5	TT	165	6.5	745	29.3	356	14.0	2184	86.0	12	15	670	1474	4.4	64	94	A6/30 kmph	A6/20 mph
	SW-99												17	21							
	SW-101												19	24							
	SW-201												11.5	14							
6.50-16	F-2	8	4.5	TT	175	6.8	760	29.9	356	14.0	2286	90.0	11	14	750	1650	3.3	48	98	A6/30 kmph	A6/20 mph
	SW-101												10	13							
	SW-201												11.5	14							
7.50-16	F-2	8	5.5	TT	205	8.0	808	31.8	381	15.0	2413	95.0	13	16	875	1925	3.7	54	103	A6/30 kmph	A6/20 mph
	SW-101												13.5	17							
	SW-201												14.5	18							
7.50-16	SW-201	12											15	19	1360	2990	4.1	60	119	A6/30 kmph	A6/20 mph
9.00-16		10	7.0		234	9.2	854	33.6	406	16.0	2540	100.0	15	19	1250	2750	3.8	55	116	A6/30 kmph	A6/20 mph
10.00-16	F-2	10	7.0	TT/TL	275	10.8	900	35.4	406	16.0	2692	106.0	18	23	1360	2992	2.8	41	119	A8/40 kmph	A8/25 mph
11.00-16		12	10		320	12.6	970	38.1	457	18.0	2896	114.0	23	29	1600	3520	2.5	36	124	A8/40 kmph	A8/25 mph
6.00-18	SW-201	8	4.5	TT	165	6.5	795	31.3	457	18.0	2340	92.1	11	14	710	1562	3.2	47	96	A8/40 kmph	A8/25 mph
7.50-18	F-2	8	5.5	TT	204	8.0	867	34.2	406	16.0	2565	101.0	15	19	950	2090	3.7	54	106	A8/40 kmph	A8/25 mph

SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
7.50-18	SW-101 SW-201	8	5.5	TT	203	8.0	869	34.2	406	16.0	2565	101.0	13.5	17	950	2090	3.7	54	106	A8/40 kmph	A8/25 mph
4.00-19	F-2	6	3.0	TT	112	4.4	712	28.0	330	13.0	2134	84.0	10	13	355	781	3.4	48	72	A6/30 kmph	A6/20 mph
6.00-19	F-2 SW-201	8	4.5	TT	165	6.5	814	32.0	381	15.0	2413	95.0	11.5	14	925	2035	4.2	60	105	A8/40 kmph	A8/25 mph
6.50-20	F-2	8	4.5	TT	173	6.8	864	34.0	406	16.0	2565	101.0	12.5	16	850	1870	4.6	65	102	A6/30 kmph	A6/20 mph
	17												21								
	13												16								
7.50-20	SW-99	8	5.5	TT	203	8.0	920	36.2	432	17.0	2718	107.0	18	23	1030	2266	3.5	50	109	A8/40 kmph	A8/25 mph
	F-2												17	21							
	SW-201												18.5	23							
	DUAL RIB PLANTER												14	18							

BIAS ROW CROP FARMING TYRES



- Excellent traction and directional stability.
- Deep lugs, low slip and optimized rubber compounds help reduce wear to give exceptionally long tire life.



GRIPKING R-1



GRIP QUEEN

SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
4.50-19	GRIPKING R-1	6	3.0	TT	122	4.8	736	29.0	343	13.5	2146	84.5	15	19	487	1071	4.4	64	83		
4.00-21	GRIPKING R-1	6	3.0	TT	115	4.5	762	30.0	350	13.8	2247	88.5	9.5	12	180	396	1.8	25	48	A8/40 kmph	A8/25 mph
	5.5												7								
5.00-21	GRIPKING R-1	6	4.0	TT	140	5.5	823	32.4	360	14.2	2310	91.0	10	13	435	957	2.7	38	79		
8.3-28	GRIPKING R-1	8	7.0	TT	211	8.3	1095	43.1	533	21.0	3251	128.0	27	34	1000	2200	2.4	34	108	A6/30 kmph	A6/20 mph
9.5-28			8.0		241	9.5	1156	45.5	543	21.4	3350	132.0	28	35	1180	2596	2.8	40	114		
4.00-30	GRIPKING R-1	4	3.0	TT	116	4.5	995	39.1	457	18.0	2938	115.7	12	15	355	781	1.3	19	72	A6/30 kmph	A6/20 mph
7.2-30		6	6.0		183	7.2	1095	43.1	533	21.0	3225	126.9	27	34	690	1518	2.1	30	95		
9.5-30		8	8.0		241	9.5	1200	47.2	559	22.0	3531	139.0	29	36	1215	2673	2.8	40	115		
8.3-32	GRIPKING R-1	8	7.0	TT	211	8.3	1193	47.0	584	23.0	3581	141.0	31	39	1090	2398	3.2	45	111	A6/30 kmph	A6/20 mph
9.5-32			8.0		241	9.5	1255	49.4	584	23.0	3683	145.0	31	39	1285	2827	2.4	35	119		
4.00-36	GRIP QUEEN	6	3.0	TT	120	4.7	1140	44.9	524	20.6	3364	132.5	6	8	412	906	2.8	41	77	A6/30 kmph	A6/20 mph
	GRIPKING R-1												12	15							
4.50-36	GRIPKING R-1	6	3.0	TT	135	5.3	1150	45.2	530	20.9	3402	134.0	12	15	450	990	2.4	35	80	A6/30 kmph	A6/20 mph
5.00-36		6	3.0		145	5.7	1175	46.2	540	21.3	3456	136.0	13	16	462	1016	2.4	35	81		
7.2-36		8	6.0		183	7.2	1255	49.4	610	24.0	3810	150.0	30	38	1000	2200	3.7	53	108		
8.3-36		8	7.0		211	8.3	1293	50.9	610	24.0	3810	150.0	28	35	1150	2530	3.2	46	113		
9.5-36		8	8.0		241	9.5	1359	53.5	623	24.5	4000	157.5	31	39	1320	2904	2.4	35	118		
12.4-36		8	11.0		315	12.4	1465	57.7	686	27.0	4318	170.0	28	35	1650	3520	2.3	33	124		
8.3-38	GRIPKING R-1	8	7.0	TT	211	8.3	1350	53.1	621	24.5	3986	157.0	31	39	1250	2750	3.5	50	116	A6/30 kmph	A6/20 mph
9.5-38			8.0		241	9.5	1405	55.3	646	25.5	4147	163.3	31	39	1800	3960	3.0	43	128		
11.2-38	GRIPKING R-1	6	10.0	TT	284	11.2	1465	57.7	693	27.2	4343	171.0	30	37	1320	2900	2.4	35	117	A6/30 kmph	A6/20 mph
12.4-38		8	11.0		315	12.4	1511	59.4	716	28.2	4496	177.0	33	42	1750	3850	2.3	33	127		
		12			2120	4664	2.8	41	134												

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
15.0/55-17	GRIPKING HD+	10	13.0	TL	380	14.9	872	34.3	377	14.8	2490	98.0	22	28	2120	4664	3.5	51	134	A8/40 kmph	A8/25 mph
19.0/45-17		14													2575	5665	4.9	71	141		
7.50-18	GRIPKING R-1	8	6.0	TT	214	8.4	854	33.6	406	16.0	2540	100.0	16	20	1180	2596	3.0	44	114	A8/40 kmph	A8/25 mph
8-18	GRIPKING HD	6	6.0	TT	203	8.0	840	33.0	381	15.0	2515	99.0	20	25	615	1353	1.9	27	91	A8/40 kmph	A8/25 mph
10.5/80-18		10	9.0	TL	274	10.7	907	35.7	406	16.0	2667	105.0	23	29	1950	4290	3.6	52	131		
12.5/80-18		12	9.0		308	12.1	987	38.8	432	17.0	2896	114.0			2650	5830	3.6	52	142		
250/80-18		10	8.0		251	9.9	857	33.7	406	16.0	2667	105.0			1600	3520	3.7	54	124		
275/80-18		10	8.0		275	10.8	906	35.6	406	16.0	2667	105.0			1650	3630	3.7	54	125		
280/70-18		10	9.0		280	11.0	849	33.4	406	16.0	2667	105.0			1180	2595	2.3	34	114		
6.50-20	GRIPKING HD	8	4.5		TT	175	6.8	865	34.0	409	16.1	2578			101.5	14.5	18	825	1815	2.8	41
7.50-20		8	6.0	214		8.4	904	35.5	432	17.0	2692	106.0	20	26	1360	2992	3.2	46	119		
9.00-20		8	7.0	260		10.2	1015	39.9	466	18.3	2988	117.6	26	33	1050	2750	3.0	36	110		
16.0/70-20	GRIPKING HD	10	14.0	TL	418	16.4	1097	43.1	483	19.0	3226	127.0	28	35	3075	6765	3.4	50	147	A8/40 kmph	A8/25 mph
	14	3750													8250	4.8	70	154			

FARM & HIGHWAY SERVICE (DOT) IMPLEMENT TYRES

- Offers D.O.T. compliance for approved operation at highway speeds.
- Noted for its great handling and towing characteristics.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
9.5L-15FI	FHS	FPLY	7.0	TL	249	9.8	767	30.2	343	13.5	2260	89	10	13	1580	3476	6.2	90	124	J/100 kmph	J/60 mph
11-15LT			8.0		266	10.5	790	31.1	353	13.9	2336	92	9.5	12	1800	3960	6.2	90	128		
12.5-15LT			10.0		325	12.8	838	33.0	368	14.5	2464	97							2120		

DRIVE WHEEL TYRES R-2

- Extra deep tread specially designed to get excellent traction on wet and sticky soil with excellent self cleaning properties, preventing mud clogging between the lugs.
- Sidewall rubber preventing weather cracking.
- Tough tread compound to resist fast wear.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
18.4-30	TR-2	8	16.0	TT	465	18.3	1580	62.2	711	28.0	4724	186.0	70	88	2430	5345	1.4	20	139	A6/30 kmph	A6/20 mph
18.4-34	TR-2						12	1682	66.2	762	30.0	5029			198.0	2650			5830		

AGRICULTURAL IMPLEMENT TYRES

- Low section Implement tyres offering high load capacity with minimum soil compaction.
- Ideal tyres for modern farming, suitable for both on and off-the-road applications.



TRENCHER



I-1



PK-303



PK-305



PK-307



RIB-777

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED												
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph											
7.00-12	PK-303	6	4.25	TL	185	7.3	665	26.2	305	12.0	1956	77.0	7	9	750	1650	3.4	48	98	A8/40 kmph	A8/25 mph											
300/65-12	RIB-777	8	9.0		305	12.0	685	27.0	305	12.0	2007	79.0	8	10	1500	3300	3.6	51	122													
10.0/80-12	PK-303	8	9.0		264	10.4	710	28.0	305	12.0	2083	82.0	10	13	1250	2750	4.2	60	116	A3/15 kmph	A3/9 mph											
23x10.50-12	TRENCHER	10	8.5		264	10.4	575	22.6	262	10.3	1697	66.8	15	19	775	1705	2.3	33	99													
		8			305	12.0	660	26.0	283	11.1	1856	73.0	17	21	1285	2827	3.0	43	117													
26x12.00-12		12	10.5																124													
9.5L-14	I-1	8	7.0	TL	240	9.4	735	28.9	330	13.0	2159	85.0	5.5	7	1090	2400	3.0	43	111	D/65 kmph	D/40 mph											
11L-14		8	8.0		274	10.8	746	29.4	333	13.1	2209	87.0	7	9	1120	2464	2.4	35	112													
200/60-14.5	RIB-777	10	6.8		210	8.3	610	24.0	279	11.0	1778	70.0	8.5	11	1030	2270	6.9	100	109	A8/40 kmph	A8/25 mph											
250/65-14.5		14			1150	2530	7.1	103							113																	
		12			1550	3410	6.5	92							123																	
5.90-15	I-1	4	4.5	152	6.0	657	25.9	295	11.6	1955	77.0	7	9	530	1166	2.5	36	86	D/65 kmph	D/40 mph												
6.70-15		6		167	6.6	703	27.7	330	13.0	2082	82.0	5	6	730	1605	3.0	44	97														
7.60-15	I-1	8	5.5	TL	190	7.5	718	28.3	325	12.8	2184	86.0	6	8	800	1760	2.8	51	100	D/65 kmph	D/40 mph											
9.5L-15		8	7.0		241	9.5	765	30.1	330	13.0	2235	88.0	10	13	1090	2400	3.0	44	111													
11L-15	I-1	8	8.0		270	10.6	790	31.1	330	13.0	2261	89.0	8	10	1150	2530	2.5	36	113													
		12			1360	2992	3.0	44	119																							
		20			1964	4320	5.3	75	131																							
12.5L-15	I-1	8	10.0	310	12.2	818	32.2	356	14.0	2413	95.0	9	11	1360	2990	2.5	36	119	D/65 kmph	D/40 mph												
		12												1750	3850	3.5	51	127														
		16												2240	4928	4.5	65	136														
		24												2725	5995	5.2	75	143														
31x13.50-15	I-1	8	10.0	TL	347	13.7	779	30.7	351	13.8	2134	84.0	8.5	11	1180	2600	3.1	45	114	A4/20 kmph	A4/12mph											
12		1600													3520	4.5	65	124														
29x12.50-15	TRENCHER	8	10.0												310	12.2	745	29.3	320			12.6	1950	76.8	14	18	850	1870	2.4	34	102	
31x15.50-15		10													13.0	394	15.5	795	31.3			358	14.0	2362	93.0	22.5	28	1450	3195	3.5	50	121

SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
			inch		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	lbs	bar	psi				
10.0/75-15.3	PK-303	10	9.0	TL	264	10.4	760	29.9	356	14.0	2235	88.0	8	10	1550	3410	5.2	75	123	A8/40 kmph	A8/25 mph
		12													1700	3750	6.4	93	126		
		14													1900	4180	6.9	101	130		
		18													2360	5200	7.1	103	138		
		22													2750	6050	7.5	108	144		
11.5/80-15.3	PK-303	10	9.0	TL	290	11.4	845	33.2	381	15.0	2464	97.0	9	11	1950	4290	4.5	65	131	A8/40 kmph	A8/25 mph
		12													2180	4800	5.5	80	135		
		14													2430	5346	6.5	94	139		
		16													2575	5675	7.1	103	141		
		18													2725	5995	7.2	105	143		
12.5/80-15.3	PK-303	14	9.0	TL	315	12.4	890	35.0	381	15.0	2591	102.0	11	14	2650	5825	5.8	84	142	A8/40 kmph	A8/25 mph
		16													2725	5995	6.5	92	144		
		18													2900	6380	6.3	89	151		
280/60-15.5	PK-303	14	9.0	TL	280	11.0	730	28.7	381	15.0	2565	101.0	8	10	1800	3960	4.0	57	128	A8/40 kmph	A8/25 mph
400/60-15.5	PK-305	10	13.0		404	15.9	874	34.4	381	15.0	2565	101.0	10.5	13	2240	4928	3.5	51	136		
		14			2900	6380	3.4	50	145												
		18			3250	7150	4.4	64	149												
6.00-16	I-1	8	4.5	TL	165	6.5	720	28.3	335	13.2	2134	84.0	8	10	690	1518	3.0	43	95	D/65 kmph	D/40 mph
6.50-16		10	4.5		175	6.9	750	29.5	335	13.2	2134	84.0	7	9	800	1760	3.0	43	100		
7.00-16		12	5.0		180	7.1	715	28.1	348	13.7	2210	87.0	7.5	9	900	1980	3.0	43	104		
7.50-16		12	5.5		190	7.5	745	29.3	360	14.2	2311	91.0	7	9	1215	2675	4.2	60	115		
10.5/65-16	PK-303	10	9.0	TL	274	10.8	755	29.7	356	14.0	2210	87.0	8	10	1550	3410	5.3	75	123	A8/40 kmph	A8/25 mph
280/70-16		14			1900	4180	7.1	104	130												
11L-16	I-1	8	8.0		280	11.0	780	30.7	363	14.3	2250	88.6	8	10	1250	2750	2.4	34	116	D/65 kmph	D/40 mph
		12	270		10.6	795	31.3	356	14.0	2337	92.0	7	9	1215	2675	2.5	36	115			
		14	310		12.2	845	33.2	381	15.0	2464	97.0	8	10	1800	3960	3.5	51	130			
12.5L-16	I-1	12	10.0		2000	4400	3.9	55	132												
		14			1850	4070	4.1	60	129												
13.0/55-16	PK-303	10	11.0		336	13.2	770	30.3	356	14.0	2261	89.0	10.5	13	2240	4928	5.8	84	136	A8/40 kmph	A8/25 mph
		14			2060	4540	4.8	69	133												
10		2240			4928	5.7	82	136													
14		2360			5200	4.1	59	138													
13.0/70-16	PK-303	10	11.0		340	13.4	900	35.4	406	16.0	2718	107.0	8.5	11	2841	6263	5.7	82	144	A8/40 kmph	A8/25 mph
		14			2900	6380	5.5	80	145												
14.0/65-16	I-1	14	11.0		353	13.9	871	34.3	381	15.0	2540	100.0	10	13	1750	3850	2.1	31	127	D/65 kmph	D/40 mph
		12		2120	4665	3.1	44	134													
		10		434	17.1	1023	40.3	455	17.9	2794	110.0	11.5	14	2360	5192	2.5	36	138			
16.5L-16.1	I-1	12	16.0	490	19.3	1023	40.3	470	18.5	2921	115.0	12	15	2725	5995	2.2	31	143	D/65 kmph	D/40 mph	
10		3000	6600	1.9	27	146															
14		3450	7790	2.2	32	151															
21.5L-16.1	I-1	16	18.0	3600	7920	2.5	36	153													
		10		2120	4664	3.6	51	134													
15.0/55-17	PK-305	14	13.0	2575	5675	4.9	71	141													
		10		2800	6175	3.9	55	144													
19.0/45-17	PK-307	14	16.0	3150	6930	4.3	62	148													
		18		3550	7810	3.8	55	152													
14		4125		9075	4.8	68	157														
18		1950		4290	3.8	55	131														
10.5/80-18	PK-303	10	9.0	275	10.8	885	35.0	406	16.0	2591	102.0	10	13	2650	5830	4.8	70	142	A8/40 kmph	A8/25 mph	
		12	308	12.1	965	38.0	432	17.0	2819	111.0	12	15	3350	7370	5.5	80	150				
12.5/80-18	PK-303	16	9.0	336	13.2	890	35.0	406	16.0	2616	103.0	10	13	2800	6160	6.7	97	144			
		10	342	13.5	902	35.5	410	16.1	2642	104.0	9	11	3650	8050	7.2	103	153				

MOUNTAIN TYRES

Unique tyre specifically designed for hilly terrain usage.



SIZE	PATTERN	PLY RATING	RIM WIDTH	TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE	
					mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi
			inch		mm	mm	mm	mm	mm	kg	lbs	bar	psi	
330/55-12	MT-777	4	10.6	TL	340	13.4	655	25.8	54	68	360	790	2.1	30







Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

HARVESTER TYRES

- Suitable for all kinds of Harvesting Machines
- Design to deliver power to the ground
- Extra deep tread
- Low soil compaction and excellent traction in the field



PK-319 HD







SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
24.5-32	PK-319 HD	12	21.0	TL	622	24.5	1806	71.1	808	31.8	5340	210.4	42	53	4375	9625	1.7	25	159	A6/30 kmph	A6/20 mph
14		4875													10725	2.0	29	163			
30.5L-32		16	27.0		5450	11990	1.8	26	167												
		18			6000	13200	2.1	30	170												

FLOTATION IMPLEMENT TYRES

- Suitably designed for on and off-the-road use, in all weather conditions.
- Patterns are engineered to provide excellent traction to drive wheels & are suited for both implement & industrial / construction applications.



FLOTATION KING






SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 				INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	40KPH MAX LOAD	50KPH MAX LOAD	25MPH MAX LOAD	30MPH MAX LOAD	bar	psi		kmph	mph
400/60-15.5	FLOTATION KING	14	13.0	TL	400	15.7	875	34.4	381	15.0	2565	101.0	19	24	2731	2272	6010	5000	3.6	51	132	A8/40 kmph	A8/25 mph
18		3256													2772	7165	6100	4.5	65	137			
14.0/65-16	FLOTATION KING	UNDER DEVELOPMENT																					
19.0/45-17		UNDER DEVELOPMENT																					
520/50-17	FLOTATION KING	16	20.0	TL	516	20.3	953	37.5	406	16.0	2820	111.0	21	26	4375	3075	9625	6765	3.6	51	159	A8/40 kmph	A8/25 mph
400/55-22.5	FLOTATION KING	16	11.75	TL	403	15.9	1020	40.1	432	17.0	3073	121.0	21.5	27	2574	2254	5510	4960	4.1	58	136	B/50 kmph	B/30 mph
400/60-22.5	FLOTATION KING	16	11.75	TL	400	15.7	1070	42.1	483	19.0	3226	127.0	21.5	27	2806	2245	6175	4940	1.5	22	136	B/50 kmph	B/30 mph
		18													3156	2504	6945	5510	3.8	55			
385/65-22.5	FLOTATION KING	16	11.75	TL	385	15.2	1070	42.1	483	19.0	3226	127.0	21.5	27	2800	2245	6175	4940	3.6	22	136	B/50 kmph	B/30 mph
		18													3150	2544	6945	5510	4.4	55			
500/45-22.5	FLOTATION KING	16	16.0	TL	500	19.7	1050	42.1	457	18.0	3099	122.0	25	31	3080	2436	6780	5360	3.7	52	138	B/50 kmph	B/30 mph
500/60-22.5		500	19.7		1170	46.1	508	20.0	3480	137.0	22	28	3456	3156	7605	6945	2.8	41	148				
550/60-22.5		550	21.7		1240	48.8	533	21.0	3738	147.2	25.5	32	3760	3356	8270	7385	3.1	45	150				
600/50-22.5		600	23.6		1170	46.1	508	20.0	3505	138.0	25.5	32	3600	3256	8050	7165	2.2	32	149				
600/55-22.5		600	23.6		1230	48.4	533	21.0	3708	146.0	25.5	32	4010	3659	8820	8050	2.2	32	153				
700/40-22.5		701	27.6		1170	46.1	511	20.1	3774	148.6	25	31	4250	3875	9350	8525	2.5	36	155				
700/50-26.5	FLOTATION KING	UNDER DEVELOPMENT																					
800/45-26.5		UNDER DEVELOPMENT																					






FORESTRY TYRES






- Excellent for both Heavy Duty Agricultural and forestry applications which ensures good all-round performance in Forestry usage as well as good traction Load Capability and Durability in Agricultural / Forestry operations.
- Developed for use on powerful forestry Tractors / Machinery.
- Deep Tread lugs mean high traction at the work area.
- Long service life thanks to the use of a wear resistant tread compound.



GRIPKING HD

24"	SIZE	RIM WIDTH  (inch)	TYPE	UNLOADED DIMENSION		STATIC LOADED RADIUS 	ROLLING CIRCUM ± 2.5 % 	PLY RATING	INFLATION PRESSURE (bar) (psi)	NSD (mm) (32nds)	CONSTANT LOAD APPLICATION																
				SW 	OD 						SPEED KPH / MPH																
				(mm) (inch)	(mm) (inch)						RECOMMENDED LOAD KG / LBS																
				DRIVE WHEEL							FORESTRY USE																
				STATIC	10 6						20 12	30 19	40 25	50 31	10*HT 6*HT	10*LT 6*LT											
11.2-24	DW10 W10 W10H	TUBETYPE	284 11.2	1112.0 43.8	518 20.4	3346 131.7	14PR	2.0 29.0	28 35	2460	1610	1190	1140	1070	970	1070	1320										
										5420	3550	2620	2510	2360	240	2360	2900										
										2600	1700	1250	1210	1130	1030	1130	1390										
										5730	3740	2750	2670	2490	2270	2490	3060										
										5730	3740	2750	2670	2490	2270	2490	3060										
										2740	1790	1320	1270	1190	1080	1190	1460										
										6040	3940	2910	2800	2620	2380	2620	3220										
										2880	1880	1390	1340	1250	1140	1250	1540										
										6340	4140	3060	2950	2750	2510	2750	3380										
										3010	1970	1450	1400	1310	1190	1310	1610										
										6630	4340	3190	3080	2890	2620	2890	3550										
										3130	2040	1510	1460	1360	1240	1360	1670										
										6890	4490	3330	3220	3000	2730	3000	3690										
										12.4-24	DW11 W11 DW10 W10	TUBETYPE	315 12.4	1175.0 46.25	524 20.6	3407 134.1	16PR	2.5 36.0	29 36	3400	2220	1640	1580	1480	1350	1480	1820
7490	4890	3610	3480	3260	2970	3260	4010																				
3570	2330	1720	1660	1550	1410	1550	1910																				
7860	5130	3790	3660	3410	3110	3410	4190																				
3700	2420	1790	1720	1610	1470	1610	1980																				
8150	5330	3940	3790	3550	3240	3550	4370																				
3860	2520	1860	1800	1680	1530	1680	2070																				
8500	5550	4100	3960	3700	3370	3700	4550																				
4000	2610	1930	1860	1740	1580	1740	2140																				
8810	5750	4250	4100	3830	3480	3830	4710																				
4140	2700	2000	1930	1800	1640	1800	2210																				
9120	5950	4410	4250	3960	3610	3960	4870																				
13.6-24	DW12 W12 W11	TUBETYPE	345 13.6	121.0 47.6	542 21.3	3531 139	16PR	1.5 22.0	29 36											3080	2010	1490	1430	1340	1220	1340	1650
																				6780	4430	3280	3150	2950	2690	2950	3630
										3310	2160	1600	1540	1440	1310	1440	1770										
										7290	4760	3520	3390	3170	2890	3170	3900										
										3520	2300	1700	1640	1530	1390	1530	1880										
										7750	5070	3740	3610	3370	3060	3370	4150										
										3750	2450	1810	1740	1630	1480	1630	2000										
										8260	5400	3990	3830	3590	3260	3590	4420										
										3930	2570	1900	1830	1710	1560	1710	2100										
										8660	5660	4190	4030	3770	3440	3770	4640										
										4140	2700	2000	1930	1800	1640	1800	2240										
										9120	5950	4410	4250	3960	3610	3960	4930										
										14.9-24	DW13 W13	TUBETYPE	378 14.9	1245 49.0	562 22.1	3673 144.6	16PR	1.5 22.0	32 40	3610	2360	1740	1680	1570	1430	1570	1930
																				7950	5200	3830	3700	3460	3150	3460	4260
3890	2540	1880	1810	1960	1540	1690	2080																				
8570	5990	4140	3990	3720	3390	3720	4580																				
4160	2720	2010	1940	1810	1650	1810	2230																				
9160	5990	4430	4270	3990	3630	3990	4910																				
4420	2880	2130	2050	1920	1750	1920	2360																				
9740	6340	4690	4520	4230	3850	4230	5200																				
4880	3180	2350	2270	2120	1930	2120	2610																				
10750	7000	5180	5000	4670	4250	4670	5740																				
5430	3540	2620	2530	2360	2150	2360	2900																				
11960	7800	5770	5570	5200	4740	5200	6400																				

SIZE	RIM WIDTH  (inch)	TYPE	UNLOADED DIMENSION		STATIC LOADED RADIUS  (mm) (inch)	ROLLING CIRCUM ± 2.5 %  (mm) (inch)	PLY RATING	INFLATION PRESSURE (bar) (psi)	NSD (mm) (32nds)	CONSTANT LOAD APPLICATION																			
			SW  (mm) (inch)	OD  (mm) (inch)						SPEED KPH / MPH																			
			RECOMMENDED LOAD KG / LBS																										
			DRIVE WHEEL							FORESTRY USE																			
			STATIC	10 6						20 12	30 19	40 25	50 31	10*HT 6*HT	10*LT 6*LT														
26"	18.4-26	W16L W15L	TUBETYPE	467 18.4	1440 56.7	656 25.8	4273 168.2	16PR	1.1 16.0	40 50	4050	2640	1950	1880	1760	1600	1760	2160											
											8920	5810	4300	4140	3880	2520	3880	4770											
											4490	2930	2160	2090	1950	1770	1950	2400											
											19.0	9890	6450	4760	4600	4300	3900	4300	5290										
											1.5	4850	3170	2340	2260	2110	1920	2110	2600										
											22.0	10680	6980	5150	4980	4650	4230	4650	5720										
											1.7	5254	3420	2530	2440	2280	2070	2280	2800										
											25.0	1150	7530	5570	5370	5020	4560	5020	6170										
											1.9	5590	3650	2700	2600	2430	2210	2430	2990										
											28.0	12310	8040	5950	5730	5350	4870	5350	6580										
											3.0	5920	3860	2860	3650	2575	2340	2575	3170										
											44.0	13040	8500	6300	8030	5670	5150	5670	6970										
											28"	13.6-28	DW12 W12 W12D	TUBETYPE	345 13.6	1320 51.9	596 23.4	3863 152.1	16PR	1.5 22.0	37 47	3240	2120	1570	1510	1410	1280	1410	1730
																						7140	4670	3460	3330	3110	2820	3110	3830
1.7	3500	2280	1690	1630	1520	1380	1512	1870																					
25.0	7710	5020	3720	3590	3350	3040	3350	4120																					
1.9	3730	2430	1800	1730	1620	1470	1620	1990																					
28.0	8220	5350	3960	3810	3570	3240	3570	4390																					
2.1	3960	2580	1910	1840	1720	1570	1720	2120																					
30.0	8720	5680	4210	4050	3790	3460	3790	4660																					
2.3	4160	2720	2010	1940	1810	1650	1810	2230																					
33.0	9160	5990	4430	4270	3990	3630	3990	4910																					
2.5	4370	2850	2110	2030	1900	1730	1900	2340																					
36.0	9630	6280	4650	4470	4190	3810	4190	5150																					
14.9-28	DW13 W13 W12D W12	TUBETYPE	378 14.9	1365 53.7	618 24.3	4019 158.2	16PR	1.5 22.0	33 41	3840		2510	1850	1790	1670	1520	1670	2050											
										8460		5530	4070	3940	3680	3350	3680	4530											
										1.7		4120	2690	1990	1920	1790	1630	1790	2200										
										25.0		9070	5930	4380	4230	3940	3590	3940	4850										
										1.9		4390	2870	2120	2040	1910	1740	1910	2350										
										28.0		9670	6320	4670	4490	4210	3830	4210	5180										
										2.1		4670	3050	2250	2170	2030	1850	2030	2500										
										30.0		10290	6720	4960	4780	4470	4070	4470	5500										
										2.5		5180	3380	2500	2410	2250	2050	2250	2770										
										36.0		11410	7440	5510	5310	4960	4520	4960	6100										
										3.0	5750	3750	2780	2680	2500	2280	2500	3080											
44.0	12670	8260	6120	5900	5510	5020	5510	6775																					
16.9-28	DW15L W15 W14L DW14	TUBETYPE	429 16.9	1440 56.7	645 25.4	4207 165.6	16PR	1.5 22.0	38 48	4740	3090	2290	2200	2060	1870	2060	2530												
										10440	6810	5040	4850	4540	4120	4540	5580												
										1.7	5080	3320	2450	2360	2210	2010	2210	2720											
										25.0	11190	7310	5400	5200	4870	4430	4870	5990											
										1.9	5430	3540	2620	2530	2360	2150	2360	2900											
										28.0	11960	7800	5770	5570	5200	4740	5200	6400											
										2.1	5750	3750	2780	2680	2500	2280	2500	3080											
										30.0	12670	8260	6120	5900	5510	5020	5510	6780											
										2.5	6370	4160	3070	2960	2770	2520	2770	3410											
										36.0	14030	9160	6760	6520	6100	5550	6100	7500											
										2.7	6670	4350	3220	3100	2900	2640	2900	3570											
										39.0	14690	9580	7090	6830	6390	5810	6390	7860											
										30"	16.9-30	DW15L W15 W14L DW14	TUBETYPE	429 16.9	1485 58.5	684 26.9	4426 174.3	16PR	2.0 29.0	40 50	5800	3780	2800	2700	2520	2990	2520	3100	
																					12780	8330	6170	5950	5550	5040	5550	6830	
2.2	6120	3990	2950	2850	2660	2420	2660	3270																					
32.0	13480	8790	6500	6280	5860	5330	5860	7210																					
2.4	6440	4200	3110	3000	2800	2550	2800	3440																					
35.0	14190	9250	6850	6610	6170	5620	6170	7590																					
2.7	6900	4500	3330	3210	3000	2730	3000	3690																					
39.0	15200	9910	7330	7070	6610	6010	6610	8130																					

SIZE	RIM WIDTH  (inch)	TYPE	UNLOADED DIMENSION		STATIC LOADED RADIUS 	ROLLING CIRCUM ± 2.5 % 	PLY RATING	INFLATION PRESSURE	NSD	CONSTANT LOAD APPLICATION								
			SW 	OD 						SPEED KPH / MPH RECOMMENDED LOAD KG / LBS								
			(mm) (inch)	(mm) (inch)	(mm) (inch)	(mm) (inch)	(bar) (psi)	(mm) (32nds)	DRIVE WHEEL					FORESTRY USE				
									STATIC	10 6	20 12	30 19	40 25	50 31	10*HT 6*HT	10*LT 6*LT		
			30"	18.4-30	W16L DW16L W15L DW15L	TUBETYPE	467 18.4	1560 61.4	712 28	4618 181.8	16PR	1.6 23.0 1.8 26.0 2.0 29.0 2.2 32.0 2.4 35.0 2.6 38.0	38 48	5980	3900	2890	2780	2600
13170	8590	6370												6120	5730	5220	5730	7050
6390	4170	3090												2970	2780	2530	2780	3420
14070	9190	6810												6540	6120	5570	6120	7530
6810	4440	3290												3170	2960	2690	2960	3640
15000	9780	7250												6980	6520	5930	6520	8020
7200	4700	3470												3550	3130	2850	3130	3850
15860	10350	7640												7380	6890	6280	6890	8470
7570	4940	3650												3520	3290	2990	3290	4050
16670	10880	8040												7750	7250	6590	7250	8920
7940	5180	3830												3690	3450	3140	3450	4240
17490	11410	8440	8130	7600	6290	7600	9350											
34"	16.9-34	DW15 W15L W14L	TUBETYPE	429 16.9	1590 62.6	722 28.4	4693 184.8	16PR	1.5 22.0 1.7 25.0 1.9 28.0 2.1 30.0 2.3 33.0 2.5 36.0	35 44	5130	3350	2480	2390	2230	2030	2230	2740
											11300	7380	5460	5260	4910	4470	4910	6040
											5500	3590	2650	2560	2390	2170	2390	2940
											12110	7910	5840	5640	5260	4780	5260	6470
											5890	3840	2840	2740	2560	2330	2560	3150
											12970	8460	6260	6040	5640	5130	5640	6940
											6230	4070	3010	2900	2710	2470	2710	3330
											13720	8960	6630	6390	5970	5440	5970	7340
											6580	4290	3170	3060	2860	2600	2860	3520
											14490	9450	6980	6740	6300	5730	6300	7750
											6900	4500	3330	3210	3000	2730	3000	3690
15200	9910	7330	7070	6610	6010	6610	8130											
34"	18.4-34	W16L DW16 W15L DW15L	TUBETYPE	467 18.4	1671 65.8	750 29.5	4914 193.5	16PR	1.5 22.0 1.7 25.0 1.9 28.0 2.1 30.0 2.3 33.0 2.5 36.0	38 48	6390	4170	3090	2970	2780	2530	2780	3420
											14070	9190	6810	6540	6120	5570	6120	7530
											6880	4490	3320	3200	2990	2720	2990	3680
											15150	9890	7310	7050	6590	5990	6590	8110
											7340	4790	3540	3410	3190	2900	3190	3920
											16170	10550	7800	7510	7030	6390	7030	8650
											7800	5090	3760	3630	3390	3080	3390	4170
											17180	11210	8280	8000	7470	6780	7470	9190
											8210	5360	3960	3820	3570	3250	3570	4390
											18080	11810	8270	8410	7860	7160	7860	9670
											8630	5630	4160	4010	3750	3410	3750	4610
19010	12400	9160	8830	8260	7510	8260	10160											
38"	16.9-38	W15L DW15 W14L	TUBETYPE	429 16.9	1675 65.9	772 30.4	5007 197.1	16PR	1.6 23.0 1.8 26.0 2.0 29.0 2.2 32.0 2.4 35.0 2.6 38.0	40 50	5640	3680	2720	2620	2420	2230	2450	3010
											12420	8110	5990	5770	5400	4910	5400	6640
											6030	3930	2910	2800	2620	2380	2620	3220
											13280	8660	6410	6170	5770	5240	5770	7100
											6420	4190	3100	2990	2790	2540	2790	3430
											14140	9230	6830	6590	6150	5590	6150	7560
											6790	4430	3270	3160	2950	2680	2950	3630
											14960	9760	7200	6960	6500	5900	6500	8000
											7130	4650	3440	3320	3100	2820	3100	3810
											15700	10240	7580	7310	6830	6210	6830	8400
											7480	4880	3610	3480	3250	2960	3250	4000
16480	10750	7950	7670	7160	6520	7160	8810											
38"	18.4-38	W16L 16DD W16A DW15L	TUBETYPE	467 18.4	1768 69.6	813 31.6	5217 205.4	16PR	1.5 22.0 1.7 25.0 1.9 28.0 2.1 30.0 2.3 33.0 2.5 36.0	38 48	6600	4310	3190	3070	2870	2610	2870	3530
											14540	9490	7030	6760	6320	5750	6320	7770
											7110	4640	3430	3310	3090	2810	3090	3800
											15660	10220	7560	7290	6810	6190	6810	8380
											7590	4950	3660	3530	3300	3000	3300	4060
											16720	10900	8060	7780	7270	6610	7270	8940
											8050	5250	3890	3750	3500	3191	3500	4310
											17730	11560	8570	8260	7710	7030	7710	9480
											8490	5540	4100	3950	3690	3360	3690	4540
											18700	12200	9030	8700	8130	7400	8130	10000
											8910	5810	4300	4150	3875	3530	3875	4770
19630	12800	9470	9140	8540	7780	8540	10500											

LAWN & GARDEN TYRES

- The tough tires withstand long hours of cutting leaving trace of their path.
- Unmatched stability, durability and puncture resistance.
- Strong sidewall and long service life thanks to the use of a wear resistant tread compound.



AVANTI



SUPERGRIP



VENUS



TRACKING

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
2.80/2.50-4	AVANTI	4	2.0	TT	69	2.7	218	8.6	103	4.1	661	26.0	3	4	95	209	1.4	20	26	A3/15 kmph	A3/9 mph
3.00-4	SUPER GRIP		2.0		85	3.3	259	10.2	122	4.8	783	30.8			110	242	1.6	23	32		
4.10/3.50-4	VENUS		3.0		105	4.1	279	11.0	132	5.2	847	33.3			160	352	1.6	23	44		
13x5.00-6	TRACKING	4	3.5	TL	130	5.1	317	12.5	145	5.7	943	37.1	4	5	200	440	2.8	40	52	A4/20 kmph	A4/12 mph
15x6.00-6		6	4.5	TL	155	6.1	366	14.4	160	6.3	1059	41.7	5	6	335	737	3.2	45	70		
		10													400	880	3.5	50	76		
16x6.50-8	TRACKING	6	5.0	TL	170	6.7	406	16.0	182	7.2	1183	47.0	5	6	355	780	2.8	41	72	A3/15 kmph	A3/9 mph
		10													430	950	3.9	56	78		

GOLF CART TYRES

- Design with a smooth wide profile and rounded shoulders for smooth sure footed ride.
- Superior Tread compound for longer life.
- Dual application tire intended for use on utility, golf as well as a wide variety of trailer applications.



POWER PLUS



POWER PLUS HD

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
18x8.50-8	POWER PLUS	6	5.5	TL	216	8.5	460	18.1	202	8.0	1334	53.0	7	9	475	1045	2.2	32	82	A4/20 kmph	A4/12 mph
20.5x8.00-10	POWER PLUS HD	10	6.0	TL	203	8.0	528	20.8	223	8.8	1450	57.1	8	10	705	1550	5.9	85	96		
22.5x8.00-12			6.5		221	8.7	546	21.5	254	10.0	1560	61.4	7	9	1150	2550	6.2	90	113		

SPORTS GROUND TYRES

- Unique tyre specifically designed for sports ground.
- Suitable for cricket, football, baseball & hockey grounds.



FIELD STAR

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	bar	psi		kmph	mph
4.00-8	FIELD STAR	4	3.75	TL	122	4.8	420	16.6	2.8	40	56	A8/40 kmph	A8/25 mph

INDUSTRIAL TYRES



RADIAL INDUSTRIAL TYRES

- Made for Agro / Industrial application
- Suitable for loading & lifting applications on Loaders and Telehandlers
- Long service life thanks to the use of a wear resistant tread compound.
- Deeper Tread providing longer tyre life.
- Prominent Rim Guard, protecting rim flange from damage.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD	LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED			
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch		mm	inch	kg	lbs	kg	lbs		bar	psi	kmph	mph
					mm	inch	mm	inch	mm	inch	mm	inch		mm	inch	kg	lbs	kg	lbs		bar	psi	kmph	mph
460/70R-24 17.5L R-24 159 A8/149 B	IND-70	DW 15L	DW 14L DW 16L	TL	465	18.3	1229	48.4	556	21.9	3840	151.2	39 49	4375	9625	4375	9625	4.0	58	159	B/50 kmph	B/30 mph		
500/70R-24 19.5L R-24 164 A8/154 B	MP-70	DW 15L	DW 15L DW 18L	TL	485	19.1	1321	52.0	584	23.0	3950	155.5	41 51	5000	11000	5000	11000	4.0	58	164	B/50 kmph	B/30 mph		

RADIAL OTR TYRES

- Industrial radial tyres which is suitable for loaders and articulated dump, solid block pattern provide excellent traction, stability & durability.



SIZE	PATTERN	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD	LOAD CAPACITY				INFLATION PRESSURE		LOAD INDEX	SPEED			
		REC	ALT		mm	inch	mm	inch	mm	inch	mm	inch		mm	inch	kg	lbs	kg	lbs		bar	psi	kmph	mph
					mm	inch	mm	inch	mm	inch	mm	inch		mm	inch	kg	lbs	kg	lbs		bar	psi	kmph	mph
17.5R-25 176 A2/167B	ER-33	14.00/1.5	14.00/1.3 (DC)	TL	447	17.6	1346	53.0	607	23.9	4021	158.3	30 37	7100	15620	5450	11990	5.0	72	176	B/50 kmph	B/30 mph		
20.5R-25	ER-33	UNDER DEVELOPMENT																						
23.5R-25	ER-33	UNDER DEVELOPMENT																						

EARTHMOVER TYRES

- The special non-directional tread design formulated with silica based tread compound, together with a heavy duty nylon carcass makes it capable of withstanding cuts, snags and bruises under all service conditions.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
9.00-20	ROCK LUG	18	7.5	TT	259	10.2	1035	42.7	476	18.7	3056	120.3	18	23	2650	5830	6.8	99	136	B/50 kmph	B/30 mph
10.00-20		20	8.0		274	10.8	1075	42.3	494	19.4	3171	124.8	24	30	2725	5995	7.5	109	143		
17.5/65-20		16	14.0		450	17.7	1090	42.9	483	19.0	3302	130.0	24	30	3250	7150	2.4	35	149		
14.00-24	ROCK LUG	24	10.0	TL	373	14.7	1368	53.8	635	25.0	4039	159.0	25	31	9500	20900	8.3	120	186	A2/10 kmph	A2/6 mph
16.9-24		12	15.0		460	18.1	1310	52.5	584	23.0	3785	149.0	25	31	3150	6930	2.8	40	148		
17.5L-24		12	15.0		462	18.2	1280	50.0	559	22.0	3683	145.0	26	32	3908	8598	3.3	47	155		
14.00-25	ROCK LUG	24	10.0	TL	375	14.8	1374	54.1	635	25.0	4039	159.0	25	31	9500	20900	8.3	120	186	A2/10 kmph	A2/6 mph
15.5-25		12	12.0		394	15.5	1278	50.3	569	22.4	3658	144.0	25	31	5600	12320	4.0	57	168		
		16	12.0		6300	13860	4.3	62	172												
17.5-25		16	14.0		432	17.0	1344	52.9	635	25.0	3955	156.0	30	38	7300	16060	4.6	67	177		
		20	14.0		8250	18150	5.5	80	181												
20.5-25		16	17.0		531	20.9	1486	58.5	686	27.0	4394	173.0	29	37	8250	18150	3.4	50	181		
		20	17.0		9500	20900	4.4	64	186												
23.5-25		16	19.5		599	23.6	1387	54.6	749	29.5	4854	191.1	33	41	9500	20900	3.3	43	186		
	20	10900		23980											3.75	53	191				
26.5-25	EM-999	28	22.0	690	27.2	1740	68.5	830	32.7	5195	204.6	33	41	9000	19800	2.75	40	181			
														15500	34100	4.8	70	203	A2/10 kmph	A2/6 mph	

GRADER TYRES

- Rugged sturdy tyres for drive wheels of off-the-road equipment.
- Tough carcass and special trade compound with weather & ozone resistant properties to withstand cuts, snags & bruises in the most severe operating conditions.
- An open spaced traction pattern with self cleaning property provides traction capability, ideally suited for graders.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
13.00-24	POWERGRIP G-2	12	8.0	TL	340	13.4	1280	50.4	584	23.0	3785	149.0	25	31	2725	5995	3.1	44	143	A8/40 kmph	A8/25 mph
		16													3250	7150	3.9	57	149		
13.00-24	MONSTER	16	8.0	TL	340	13.4	1280	50.4	584	23.0	3785	149.0	33	42	3250	7150	4.1	58	149		
14.00-24	POWERGRIP G-2	12	10.0	TL	375	14.7	1350	53.1	610	24.0	4013	158.0	25	31	3075	6750	2.4	35	147	A8/40 kmph	A8/25 mph
		16													3650	8030	3.4	50	153		
14.00-24	MONSTER	16	10.0	TL	375	14.7	1350	53.1	610	24.0	4013	158.0	33.5	42	3650	8030	3.8	54	153		
15.5-25	POWERGRIP G-2	16	12.0	TL	386	15.2	1270	50.0	571	22.5	3772	148.5	23.5	30	3250	7150	3.1	45	149		
17.5-25			14.0		444	17.5	1331	52.4	597	23.5	3950	155.5	24.5	31	3350	7370	3.9	56	150		

RADIAL SKID STEER TYRES

- **SSR-77** - Deeper depth tyre tread for longer life. Bigger and sturdier blocks. Excellent chip & tear resistance compound. Extra thick side wall with rim guard gives protection against damages.



SIZE	PATTERN	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
				mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
265/70R-16.5 10R-16.5	SSR-77	8.25	TL	267	10.5	772	30.4	348	13.7	2345	92.3	28.5	36	1900	4180	4.0	58	130	A6/30 kmph	A6/20 mph
305/70R16.5 12R-16.5		9.75		305	12.0	833	32.8	374	14.7	2479	97.2	30	38	2775	5995	4.0	58			

SKID STEER TYRES

- **MONSTER** - Extra deep tread with sturdy lug design. strong casing with heat and cut resistant tread compound provide longer life. Extra thick side wall with rim guard gives protection against damage.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
23x8.50-12	MONSTER	8	7.0	TL	216	8.5	584	23.0	254	10.0	1727	68.0	18	23	690	1518	3.5	50	90	A5/25 kmph	A5/16 mph
27x8.50-12		10	7.0		218	8.6	676	26.6	305	12.0	2006	79.0	22	28	1000	2200	4.3	61			
10.0/75-15.3	MONSTER	14	9.0	TL	259	10.2	775	30.5	356	14.0	2311	91.0	33	42	2120	4664	4.7	68	134	A6/30 kmph	A6/18 mph
10-16.5	MONSTER	12	8.25	TL	259	10.2	798	31.4	366	14.4	2337	92.0	36	45	2180	4796	4.4	64	135	A8/40 kmph	A8/20 mph
12-16.5		14	9.75		307	12.1	838	33.0	384	15.1	2515	99.0	36	45	2765	6083	4.8	70			
14-17.5	MONSTER	14	10.5	TL	358	14.1	935	36.8	427	16.8	2743	108.0	35	44	3900	8580	5.5	78	155	A5/25 kmph	A5/16 mph
20.5-25		20	17	TT/TL	531	20.9	1486	58.5	686	27.0	4394	173.0	59	74	9500	20900	4.5	64			
															6000	13200	3.2	45	170	B/50 kmph	B/30 mph

- **ROCKPLUS HD** - Deep tread, extra thick sidewall & tough casing ensure longer life. silica & natural rubber base compound provides greater chip & tear resistance.









SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
10-16.5	ROCK PLUS HD	12	8.25	TL	268	10.5	790	31.1	356	14.0	2286	90.0	29	37	2120	4664	5.1	74	134	A8/40 kmph	A8/25 mph
12-16.5		14	9.75		325	12.8	866	34.1	381	15.0	2438	96.0	33	42	2240	4928	6.2	90			
10.00-20	ROCK PLUS HD	18	8.25	TT	284	11.2	1080	42.5	508	20.0	3175	125.0	30	38	6500	14300	8.3	118	173	A8/40 kmph	A8/25 mph
12.00-20		20	8.25		320	12.6	1151	45.3	530	20.9	3390	133.5	34	43	6900	15180	9.8	142			
															7750	17050	9.0	130	179	A6/30 kmph	A6/18 mph

- **STEERKING HD+** - Premium conventional skid steer tyre with deeper tread depth, premium compound, large tread lugs * heavier sidewall.









STEERKING HD+

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
10-16.5	STEERKING HD+	8	8.25	TL	268	10.5	795	31.3	356	14.0	2286	90.0	16	20	1360	2992	4.0	58	119	A8/40 kmph	A8/25 mph
		10													1550	3410	5.1	74	123		
		12													1700	3740	5.2	75	126		
12-16.5	STEERKING HD+	10	9.75	TL	325	12.8	853	33.6	381	15.0	2438	96.0	19	24	1850	4070	4.1	60	129	A8/40 kmph	A8/25 mph
		12													2060	4532	5.4	78	133		

- **STEER PLUS HD** - Premium tyre with extra deep tread & thick sidewalls providing better traction, puncture resistance and longer life. Specially designed rim guard ensures greater protection against flats & wheel damage in the rim flange area.









STEER PLUS HD

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
23x8.50-12	STEER PLUS HD	6	7.0	TL	216	8.5	584	23.0	254	10.0	1727	68.0	12	15	600	1320	3.3	48	90	A8/40 kmph	A8/25 mph
27x8.50-15		8	7.0		218	8.6	676	26.6	305	12.0	2006	79.0	950	2090	4.1	60	106				
31.5x13-16.5	STEER PLUS HD	14	9.75	TL	328	12.9	803	31.6	356	14.0	2337	92.0	18	23	2430	5346	4.7	68	139	A5/25 kmph	A5/16 mph
33x15.5-16.5			13.0		394	15.5	838	33.0	381	15.0	2464	97.0			3150	6930	5.1	74	148		
14-17.5	STEER PLUS HD	14	10.5	TL	348	13.7	940	37.0	406	16.0	2743	108.0	24	30	2900	6380	5.5	80	145	A5/25 kmph	A5/16 mph
15-19.5			11.75		401	15.8	1036	40.8	457	18.0	3048	120.0			3350	7370	4.8	70	150	A8/40 kmph	A8/25 mph

- **STEERKING+** - Wide wall tyres with side wall and rim guard protectors, meant for the value conscious performance oriented applications.



STEERKING +

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
10-16.5	STEERKING +	10	8.25	TL	268	10.5	795	31.3	356	14.0	2286	90.0	13	16	1560	3432	5.1	74	123	A8/40 kmph	A8/25 mph
		12													1650	3630	5.2	75	125		
12-16.5		12	9.75		312	12.3	825	32.5	381	15.0	2438	96.0	14	18	1850	4070	4.4	64	129		
		14													2120	4664	4.8	70	134		

DRIVE WHEEL R-3 TYRES

- Tread specially designed to give minimum ground disturbance.
- Suitable for use on orchards, soft soil, road construction and similar applications.



SIZE	PATTERN	PLY RATING	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi	kmph		mph	
14.9-24	SW-333	8	13.0		TL	378	14.9	1262	49.7	574	22.6	3835	151.0	17.5	22	1286	3570	1.8	26	128	A6/30 kmph	A6/20 mph
23.1-26	SW-333	8	20.0	TL	587	23.1	1560	61.4	686	27.0	4547	179.0	27	35	2900	6380	1.0	16	145	A6/30 kmph	A6/20 mph	
		12													3650	8030	1.7	24	153			
		16													4375	9625	2.2	32	159			
18.4-26	SW-333	12	16.0	TL	475	18.7	1430	56.3	635	25.0	4140	163.0	23	29	3000	6600	2.2	33	146	A6/30 kmph	A6/20 mph	
13.6-28		8	12.0		345	13.6	1318	51.9	587	23.1	3835	152.0	17	21	1650	3630	2.0	29	125			

EXCAVATOR TYRES

- Speedways Excavator Tyres are designed to heavy duty service.
- Specially engineered tread pattern provides excellent traction, good self cleaning as well as good on the road drive ability.



SIZE	PATTERN	PLY RATING	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
			STD. ALT.			mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
			inch	inch																		
8.25-20	EV-999	14	6.5	7.0	TT	236	9.3	980	38.6	457	18.0	2972	117.0	19	24	2065	4545	6.8	98	133	B/50 kmph	B/30 mph
9.00-20		14	7.0	7.5		257	10.1	1039	40.9	483	19.0	3073	121.0	20.5	26	2500	5500	7.0	102	140		
10.00-20		16	7.5	8.0		277	10.9	1075	42.3	508	20.0	3175	125.0	20	25	3000	6600	7.6	109	146		

INDUSTRIAL TYRES

- Premium tyres with superior tread compound, larger tread lugs and extra heavy sidewall.



SIZE	PATTERN	PLY RATING	RIM WIDTH		TYPE	SECTION WIDTH		OVERALL DIAMETER		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED		
			inch	mm		inch	mm	inch	mm	32nds	kg	lbs	bar	psi	kmph		mph		
240/55D17.5	OFFROADER	10	6.75		TL	229	9.0	731	28.7	12	15	2120	4665	6.8	99	134	B/50 kmph	B/30 mph	
355/55D625	DUGRIGGER	14	11.75			355	14.0	935	36.8	19	25	3550	7810	3.7	53	152			
385/65D19.5	DUGRIGGER	UNDER DEVELOPMENT																	
385/65D22.5																			

INDUSTRIAL TRACTOR TYRES

- Extra wide lugs designed to resist buckling, tearing & cracking.
- Excellent tread wear and road ability, the laterally designed lugs result in even wear.



F-3



AT-999



MPT



MONSTER



POWER LUG R-4

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
11L-15	F-3	10	8.0	TL	280	11.0	813	32.0	355	14.0	2362	93.0	12	15	1060	2332	3.5	51	110	A8/40 kmph	A8/25 mph
33x12.5-15	AT-999	8	10.0	TL	318	12.5	851	33.5	381	15.0	2489	98.0	19	24	2120	4664	3.2	46	134		
11L-16	F-3	12	8.0	TL	280	11.0	820	32.3	381	15.0	2438	96.0	12	15	1250	2750	4.3	62	116	A8/40 kmph	A8/25 mph
		14													1360	2992	4.8	70	119		
11L-16	MONSTER	14	8.0	TL	280	11.0	820	32.3	381	15.0	2438	96.0	21	26	1360	2992	4.8	70	119		
12.5/70-16	AT-999	14	10.0	TL	315	12.4	853	33.6	381	15.0	2590	102.0	20	25	1650	3630	2.7	38	125		
10.5/80-18	MPT	10	9.0	TL	267	10.8	910	35.8	406	16.0	2667	105.0	23	29	1950	4290	5.0	72	131	A8/40 kmph	A8/25 mph
12.5/65-18		12			305	12.0	950	37.4	415	16.3	2781	109.5	23	29	2430	5345	3.5	51	10		
12.5/80-18	MPT	12	9.0	TL	307	12.1	988	38.9	432	17.0	2896	114.0	24	30	2650	5830	3.7	54	142	A8/40 kmph	A8/25 mph
		16													3150	6930	4.9	70	148		
12.5/80-18	MONSTER	16	9.0	TL	305	12.0	975	38.4	432	17.0	2896	114.0	33	42	2650	5830	3.6	55	142		
15.5/60-18	AT-999	14	13.0	TL	401	15.8	950	37.4	432	17.0	2870	113.0	24	30	2430	5346	2.6	38	139	A8/40 kmph	A8/25 mph
15.5/70-18		12													1031	40.6					
17.5/65-20	AT-999	14	14.0	TL	450	17.7	1090	42.9	483	19.0	3302	130.0	26	33	3250	7150	2.4	35	149	A8/40 kmph	A8/25 mph
16.9-24	AT-999	12	15.0	TL	450	17.7	1303	51.3	584	23.0	3785	149.0	30	38	3250	7150	2.6	37	149	A8/40 kmph	A8/25 mph
															16	3875	8525	3.3	48		
17.5L-24	AT-999	12	15.0	TL	452	17.8	1270	50.0	559	22.0	3683	145.0	28	35	3150	6930	2.6	38	148	A8/40 kmph	A8/25 mph
															16	3750	8250	3.3	48		
18.4-24	AT-999	12	16.0	TL	472	18.6	1372	54.0	603	24.0	4039	159.0	29	37	3875	8525	2.5	35	155	A8/40 kmph	A8/25 mph
19.5L-24		12	16.0	TL	495	19.5	1321	52.0	584	23.0	3835	151.0	28	35	3450	7590	2.3	33	151		
16.9-24	POWER LUG R-4	12	15.0	TL	440	17.3	1308	51.5	584	23.0	3861	152.0	26	33	3250	7150	2.6	38	149	A8/40 kmph	A8/25 mph
17.5L-24					445	17.5	1270	50.0	559	22.0	3683	145.0	27	34	3150	6930	2.6	38	148		
18.4-24	POWER LUG R-4	12	16.0	TL	472	18.6	1375	54.1	603	32.7	4039	159.0	28	35	3875	8525	2.4	35	155		
19.5L-24	POWER LUG R-4	12	16.0	TL	495	19.5	1321	52.1	584	23.0	3835	151.0	28	35	3450	7590	2.3	33	151	A8/40 kmph	A8/25 mph
		16	16.0		495	19.5	1325	51.9	584	23.0	3835	151.0	28	35	4125	9075	3.0	44	157		
19.5L-24	MONSTER	16	17.0	TL	490	19.3	1298	51.1	589	23.2	3835	151.0	40	50	4125	9075	3.0	44	157		
21L-24	POWER LUG R-4	12	18.0	TL	533	21.0	1377	54.2	610	24.0	3988	157.0	28.5	36	3875	8525	2.1	32	155		
18.4-26	AT-999	12	16.0	TL	480	18.9	1422	56.0	635	25.0	4140	163.0	30	38	4000	8800	2.4	36	156	A8/40 kmph	A8/25 mph
	MONSTER				475	18.7	1425	56.1	635	25.0	4191	165.0	38	48	4000	8800	3.1	45	156		
18.4-26	POWER LUG R-4	12	16.0	TL	475	18.7	1425	56.1	635	25.0	4191	165.0	28	38	4875	10725	2.9	42	163	A8/40 kmph	A8/25 mph
		16													3750	8250	2.8	41	154		
16.9-28	MONSTER	12	15.0	TL	440	17.3	1410	55.5	635	25.0	4140	163.0	35	44	3550	7810	2.6	38	152	A8/40 kmph	A8/25 mph
	AT-999				29	37															
	POWER LUG R-4				440	17.3															
16.9-30	POWER LUG R-4	12	15.0	TL	440	17.3	1460	57.5	660	26.0	4216	166.0	27	34	3650	8030	2.6	38	153	A8/40 kmph	A8/25 mph

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

MULTI PURPOSE TRUCK (MPT) TYRES

- Tyres for multi purpose trucks, designed for use on highways, off-the-road and agriculture applications. Specially engineered tread pattern offers maximum flexibility.
- Good traction in all weather conditions.
- Good on-the-road drive ability and self cleaning properties.









MPT-007



MPT-999



GRIPMAX





SIZE	PATTERN	PLY RATING	RIM WIDTH  inch	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY ↓ 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
10.0/75-15.3	MPT-007	10	9.0	TL	259	10.2	775	30.5	356	14.0	2311	91.0	18	23	1550	3410	3.8	55	123	A8/40 kmph	A8/25 mph
		12													1700	3740	4.6	67	126		
		14													1900	4180	5.4	78	130		
		18													2200	4840	6.9	100	135		
11.5/80-15.3	MPT-007	10	9.0	TL	292	11.5	869	34.2	381	15.0	2564	101.9	18	23	1950	4290	3.3	48	131	A8/40 kmph	A8/25 mph
		14													2430	5345	4.6	67	139		
		18													2725	5995	5.9	85	143		
10.5-18	MPT-007	10	9.0	TL	269	10.6	904	35.6	406	16.0	2692	106.0	20	25	1700	3740	3.75	53	127	A8/40 kmph	A8/25 mph
12	2180	4796	4.4	64	135																
12.5-18	MPT-007	10	11.0	TL	325	12.8	991	39.0	457	18.0	2946	116.0	23	29	2060	4532	2.9	42	133	A8/40 kmph	A8/25 mph
		12													2240	4930	3.4	50	136		
		14													2430	5345	3.8	55	139		
18-19.5	MPT-007	16	14.0	TL	460	18.1	1105	43.5	508	20.0	3277	129.0	26	33	4750	10450	5.9	85	162	A8/40 kmph	A8/25 mph
		18													5450	11990	7.0	102	167		
10.5-20	MPT-007	10	9.0	TL	269	10.6	955	37.6	457	18.0	2870	113.0	20	26	2060	4532	3.7	54	133	A8/40 kmph	A8/25 mph
12.5-20	MPT-007	10	11.0	TL	325	12.8	1039	40.9	483	19.0	3099	122.0	23	29	2120	4665	2.9	42	134		
		12													2300	5060	3.4	50	137		
		16													2500	5500	3.6	52	140		
18	2725	5995	3.8	55	143																
14.5-20	MPT-007	10	11.0	TL	361	14.2	1115	43.9	483	19.0	3302	130.0	25	31	2300	5060	2.5	36	137	A8/40 kmph	A8/25 mph
		12													2500	5500	2.8	40	140		
		14													2800	6160	3.4	50	144		
		18													3150	6930	4.4	64	148		
16.0/70-20	MPT-999	14	13.0	TL	404	15.9	1128	44.4	483	19.0	3353	132.0	23	29	3250	7150	3.4	50	149	B/50 kmph	B/30 mph
18-22.5	MPT-999	12	14.0	TL	465	18.3	1189	46.8	533	21.0	3530	139.0	28	35	4500	9900	4.4	64	160		
16.0/70-24	GRIPMAX	14	13.0	TL	404	15.9	1184	46.6	356	14.0	3530	139.0	29	37	3550	7810	3.5	50	153		

COMPACTOR TYRES

- Speedways compactor tyres are engineered to provide even distribution of ground pressure & to give optimum compaction.
- Tread compound specially formulated to endure high temperatures and minimize loose materials sticky to tyres.



ROAD KING

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		LOAD CAPACITY 				INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	10 KPH MAX LOAD		20 KPH MAX LOAD		bar	psi		kmph	mph
									kg	lbs	kg	lbs					
7.50-15	ROADKING	6	6.0	TT	226	8.9	790	31.1	1700	3740	1500	3300	3.9	57	122	A4/20 kmph	A4/12 mph
		14							2800	6160	2300	5060	8.6	125			
8.5/90-15K	ROADKING	14	6.0	TL	231	9.1	785	30.9	3000	6600	2240	4928	3.4	50	136		
9.00-20	ROADKING	12	7.0	TT	274	10.8	1016	40.0	4125	9075	3150	6930	6.2	90	148	A4/20 kmph	A4/12 mph
		14							4500	9900	3450	7590	7.2	104			
11.00-20	ROADKING	16	8.0	TT	305	12.0	1082	42.6	5450	11990	4375	9625	7.2	104	159	A4/20 kmph	A4/12 mph
		18							6000	13200	4625	10175	8.1	118			

INDUSTRIAL FORKLIFT TYRES

- Premium tyre, designed for heavy duty service on forklift trucks, material handling & mining equipment.
- The deep tread, extra thick sidewalls & touch casing provide exceptional durability & minimize the risk of punctures & accidental damages.
- Silica & natural rubber in tread compound provides greater chip and rear resistance.
- Specially designed rim guard ensures protection against flats & wheel damages in the rim flange area



LIFTKING HD



LIFTPOWER



ROCK PLUS HD

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED		
					mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph	
																		mm
4.80/4.00-8	LIFTKING HD	8	3.0	TT/TL	117	4.6	414	16.3	7	9	530	1165	10.0	145	86	A6/30 kmph	A6/20 mph	
5.70/5.00-8		TT		132	5.2	467	18.3	7	9	1400	3080	9.8	142	120				
6.90/6.00-9	LIFTKING HD	10	4.0	TT	160	6.3	540	21.2	10	13	1700	3740	8.3	120	126	A6/30 kmph	A6/20 mph	
6.50-10		12	5.0		178	7.0	595	23.4	11	14	2180	4796	8.8	128				135
7.00-12		14	5.0		180	7.1	690	27.1	12	15	2725	5995	8.8	128				143
23x5	LIFTPOWER	10	4.0	TT	155	6.1	635	25.0	10	13	2000	4400	8.0	114	132			
7.00-15	LIFTKING HD	12	5.5	TT	201	7.9	749	30.4	16	20	3075	6765	8.6	125	147	A6/30 kmph	A6/20 mph	
7.50-15		14	6.0		211	8.3	772	28.3	14	18	3000	6600	9.0	130				146
28x9-15		14	7.0		213	8.4	720	33.7	16	20	3875	8525	9.8	142				155
8.25-15		16	6.5		239	9.4	855	33.6	14	18	3550	7810	9.1	131				152
250-15	ROCKPLUS HD	20	7.0/7.5	TT	240	9.4	845	33.2	18	23	5000	11000	10.0	145	164	A8/40 kmph	A8/25 mph	
300-15		20	8.0		300	11.8	1180	46.4	22	28	6500	14300	9.0	128				173
10.00-20	ROCKPLUS HD	18	7.5	TT	284	11.2	1080	42.5	33	42	6500	14300	8.3	120	173	A8/40 kmph	A8/25 mph	
12.00-20		20	8.5		320	12.6	1151	45.3	36	45	7750	17050	9.0	130				179

Tolerances: O.D. ± 2.5% - S.W. ± 2.5% - RC ± 2.5%

TRUCK & LIGHT TRUCK TYRES



RANGER



HUNTER



STORM



LOAD KING



TIGER



MILEAGE MAKER



SAMRAT +



MILESTONE



SILVER STONE



TOUGH TRACK PLUS



LOAD POWER



GTSW

TRUCK & LIGHT TRUCK TYRES (D.O.T)

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED			
					inch	mm	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph		
LT205/90D15(7.00-15E)	MILESTONE	10	5.5	TL	206	8.1	770	30.3	8.0	10	1180	2600	4.5	65	114	P/150 kmph	P/94 mph		
LT225/90D16(7.50-16E)			6.0		218	8.6	823	32.4			1590	3500	5.6	80				124	
5.00-10	RANGER	10	3.5	TT	155	6.1	531	20.9	10	13	450	990	3.0	43	80	J/100 kmph	J/60 mph		
4.50-12	RANGER	8	3.0	TT	127	5.0	544	21.4	8.5	11	290	640	2.4	35	65	L/120 kmph	L/75 mph		
		10									325	715	2.8	40				69	
5.00-12	RANGER	10	3.5	TT	142	5.6	564	22.3	10	13	500	1100	4.3	61	84				
5.60-14	HUNTER	10	4.0	TT	145	5.7	640	25.2	12	15	580	1276	4.3	61	89				
6.00-14	STORM	8	4.5	TT	170	6.7	681	26.8	7	9	683	1502	4.3	61	95	J/100 kmph	J/60 mph		
		10									785	1727	5.4	77				103	
6.50-14	STORM	8	4.5	TT	180	7.1	704	27.7	12	15	850	1870	4.3	62	102				
		10									925	2035	4.5	65				105	
6.40-15	MILESTONE	8	4.0	TT	160	6.3	693	27.3	12	15	710	1562	4.2	60	96				
		10									825	1815	5.4	77				101	
6.70-15	MILESTONE	8	4.5	TT	165	6.5	710	28.0	12	15	825	1815	4.2	60	101				
		10									925	2035	5.4	77				105	
7.00-15	MILEAGE MAKER	12	5.5	TT	206	8.1	770	30.3	13	17	1180	2596	6.2	90	114	J/100 kmph	J/60 mph		
	MILSTONE																	12	15
	TIGER																	17	21
7.50-15	MILESTONE	12	6.0	TT	216	8.5	780	30.7	13	17	1360	2990	5.5	80	119				
		14									1450	3190	6.2	90				121	
6.00-16	SILVERSTONE	10	4.5	TT	174	6.9	752	29.6	10	13	875	1925	5.3	75	103				
	TOUGH TRACK PLUS		4.0																
6.50-16	SILVERSTONE	12	4.5	TT	185	7.3	765	30.1	10	13	1030	2266	4.7	68	109				
7.00-16	MILESTONE	10	5.5	TT	206	8.1	785	30.9	13	16	1090	2398	5.3	75	103				
		12									1215	2675	6.2	90				115	
		14									1320	2904	6.9	100				118	
7.50-16	MILESTONE	12	6.0	TT	218	8.6	823	32.4	12	15	1400	3080	6.2	90	120	J/100 kmph	J/60 mph		
		14									1500	3300	7.0	99				122	
7.50-16	LOAD KING	16	6.0	TT	218	8.6	823	32.4	17.5	22	1600	3520	7.6	110	124				
	GTSW								11	14									
8.25-16	MILESTONE	14	6.5	TT	231	9.1	841	33.1	13	16	1800	3960	6.9	100	128				
	LOAD KING	16							17	22	1850	4070	7.6	110				129	
9.00-16	SAMRAT +	16	6.5	TT	254	10.0	914	36.0	18	23	2120	4664	7.2	105	134				
		18									2475	5445						140	
9.00-20	MILEAGE MAKER	14	7.0	TT	259	10.2	1025	40.3	15	19	2575	5665	7.6	110	141				
	LOAD KING	16					1035	40.7	18	23	2650	5830	7.9	115				142	
10.00-20	MILESTONE	16	7.5	TT	274	10.8	1060	41.7	18	23	3000	6600	7.9	115	146	J/100 kmph	J/60 mph		
	TIGER	18					1075	42.3	25	31	3075	6765	8.5	121				147	
11.00-20	MILESTONE	16	8.0	TT	290	11.4	1082	42.6	14	18	3250	7150	8.1	115	149				
12.00-24	LOAD POWER	18	8.5	TT	312	12.3	1240	48.8	20	25	4250	9350	8.1	115	158	J/100 kmph	J/60 mph		

TRAILER & VINTAGE VEHICLE TYRES



SULTAN



RANGER



MILESTONE +



LANDMARK



I.A.P.



STORM



MILLENNIUM



DUST STORM



SAMRAT



TRACKGRIP

TRAILER TYRES

SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED			
					mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph		
4.80-8	SULTAN	6	3.8	TT	122	4.8	420	16.5	8	10	335	737	6.3	89	70				
5.70-8		8	4.5		150	5.9	467	18.3			488	1074	7.1	100				83	
4.50-10	RANGER	8	3.5	TT	132	5.2	490	19.3	10	13	520	1145	5.0	72	86	F/80 kmph	F/50 mph		
5.00-10		8			135	5.3	510	20.0			580	1276	5.0	72				89	
145-10	I.A.P	8	5.5	TT	140	5.5	500	19.7	8	10	500	1100	4.5	65	84	A8/40 kmph	A8/25 mph		
7.50-10		10			206	8.1	645	25.3			1360	2992	6.2	90				119	
4.80-12	RANGER	6	3.8	TT	127	5.0	526	20.7	7	9	450	990	6.3	89	80	L/120 kmph	L/75 mph		
5.30-12	MILESTONE+	6	4.3	TT	135	5.3	550	21.6	7	9	475	1045	5.6	79	82				
5.65-12		4	4.0		140	5.5	520	20.5	7	9	250	550	1.7	24	60				
145D-12		8	4.0		140	5.5	540	21.2	8	10	375	825	2.3	32	74				
155D-12	LANDMARK	8	4.5	TT	155	6.1	558	22.0	10.5	13	560	1230	3.6	51	83	K/110 kmph	K/68 mph		
165D-13		10	625		1375	6.3	89	92											
5.60-13	STORM	6	4.0	TT	155	6.1	595	23.4	6	8	385	847	2.8	40	75	A8/40 kmph	A8/25 mph		
175D-14			4.5		165	6.5	596	23.5			475	1045	2.8	40	82				
E78-14	MILESTONE+	6	5.5	TT	188	7.4	656	25.8	11	14	620	1364	2.2	31	91	A8/40 kmph	A8/25 mph		
175D-14			5.0		178	7.0	656	25.8			615	1353	3.1	41	91				
5.90-15	MILESTONE+	8	4.0	TT	150	5.9	670	26.4	6	8	460	1012	2.0	28	81	A8/40 kmph	A8/25 mph		
F78-15	MILENNIUM	6	5.5		198	7.8	694	27.3			9	11	760	1672	3.5			50	98
195/80D-15	MILESTONE+	8	5.5		195	10	697	27.4			13	16	775	1705	4.2			60	99
9.00-15	DUST STORM	8	6.5		254	10	865	34.0			10	13	1100	2420	3.5			50	112
9.00-16	DUST STORM	8	6.5	TT	254	10	898	35.3	9.5	12	1210	2662	3.5	50	115	A8/40 kmph	A8/25 mph		
215/75-17.5	TRACKGRIP	12	6.8	TT	213	8.4	780	30.7	8	10	2120	4664	7.0	100	134	A8/40 kmph	A8/25 mph		
225/75-17.5		16			2650	5830	9.0	128			142								
225/75-17.5		16			224	8.8	795	31.3			8	10	2900	6380	9.0			128	145
235/75-17.5					236	9.3	810	31.9			8	10	3400	7480	9.0			128	151

VINTAGE VEHICLE TYRES

8.25-10	I.A.P	8	6.0	TT	211	8.3	675	26.5	10	13	1375	3025	7.1	100	120	A3/15 kmph	A3/9 mph
5.00-19	VIRAT	6	3.0	TT	135	5.3	746	29.3	5	6	670	1474	3.8	54	94	A3/15 kmph	A3/9 mph
6.00-19	SAMRAT	8	3.6		160	6.3	800	31.5	5.5	7	925	2035	4.2	60	105		
7.00-19		10	5.0		193	7.6	860	33.8	7	9	1360	2992	5.2	74	119		
8.00-19		12	5.0		1450	3190	5.4	76	121								
		10	5.0	221	8.7	910	35.8	6.5	8	1650	3630	5.2	74	125			

ELECTRIC VEHICLE TYRES



ER-007
(TUBETYPE)

3.00-12, 3.75-12, 3.00-14



CITY STAR
(TUBETYPE)

3.00-12, 90/90-12



R-5
(TUBETYPE)

3.00-14



ROAD STAR
(TUBETYPE)

3.00-14



ER-003
(TUBETYPE)

3.75-12

MILITARY JEEP

4x4 TYRES

- Excellent for ON/OFF Road applications and ensures good all-round performance as well as good traction and durability in ON/OFF Road applications.

- Each tyre features bias belted construction for superior strength and impact resistance, these tyres are built to handle the toughest Off-Road conditions on the planet.



SIZE	PATTERN	PLY RATING	RIM WIDTH 	TYPE	SECTION WIDTH 		OVERALL DIAMETER 		STATIC LOADED RADIUS 		ROLLING CIRCUM ± 2.5 % 		NSD		LOAD CAPACITY 		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
145-12M	ML-999	4	4.0	TT	145	5.7	561	22.1	260	10.2	1646	65.0	13	16	400	880	3.7	45	76	E/70 kmph	E/44 mph
6.00-16	MILITARY	8	4.5	TT	168	6.6	752	29.6	330	13.0	2184	86.0	11	14	690	1518	4.2	60	95	G/90 kmph	G/56 mph
7.00-16	MILITARY	8	5.5	TT	196	7.7	785	30.9	366	14.4	2362	93.0	12	15	975	2145	3.8	40	107		
7.50-16	MILITARY	8	6.0	TT	221	8.7	825	32.5	374	14.7	2393	94.2	12	15	1090	2376	4.2	61	111		
		12													1250	2750	6.2	90	116		
7.50-16	GTSW	8	6.0	TT	218	8.6	823	32.4	374	14.7	2393	94.2	11	14	1120	2664	4.2	60	112		
9.00-16	MILITARY	8	6.5	TT	244	9.6	905	35.6	424	16.7	2768	109.0	15	19	1360	2990	3.4	50	119		
		14	1650												3630	6.2	90	125			
8.25-20	MILITARY	10	6.0	TT	234	9.2	925	36.4	389	15.3	2483	97.8	15	19	1600	3520	5.3	75	124	G/90 kmph	G/56 mph
7.50-20	MILITARY	8	6.0	TT	208	8.2	930	36.6	432	17.0	2692	106.0	13	16	1450	3190	5.0	72	121		
		14													1775	3905	7.4	105	128		
9.00-20	MILITARY	12	7.5	TT	259	10.2	1034	40.7	483	19.0	3124	123.0	16	20	2060	4532	6.0	85	133		
10.00-20					284	11.2	1080	42.5	508	20.0	3175	125.0	18	22	2180	4790	5.3	75	135		
12.00-20	MILITARY	18	8.5	TT	320	12.6	1138	44.8	524	20.6	3360	132.3	22	28	3250	7150	7.3	105	149		
	SANDGRIP												20	25							
12.00-24	MILITARY	UNDER DEVELOPMENT																			

THREE WHEELER TYRES



RANGER/ KRANTI
(TUBETYPE)

4.00-8, 4.50-10



S-401 / LOADKING
(TUBETYPE)

4.00-8, 4.50-10



S-101 / R-101
(TUBETYPE)

4.00-8



S-501 / R-501
(TUBETYPE)

4.00-8



S-601
(TUBETYPE)

4.00-8

TWO WHEELER TYRES



B-1
(TUBELESS)

90/90-12, 100/90-17, 3.00-17
3.00-18, 2.75-18, 100/90-18



B-3
(TUBELESS)

110/90-16, 110/90-17
3.25-18, 3.50-18



B-5
(TUBELESS)

2.75-18, 3.00-18



B-7
(TUBELESS)

110/90-16



F-1
(TUBELESS)

2.75-17, 90/90-17, 80/100-17
3.00-17, 2.75-18, 90/90-18,
80/100-18



F-3
(TUBELESS)

140/70-17, 150/70-17



FR-1
(TUBELESS)

130/70-17



KOBRA
(TUBELESS)

3.00-17, 100/90-17, 120/80-17
2.75-18, 3.00-18, 100/90-18



MF-101
(TUBELESS / TUBE-TYPE)

2.50-16, 2.50-18, 2.75-17
2.75-18, 3.00-18



R-3
(TUBE-TYPE)

3.25-16, 2.75-18, 3.00-18



R-5
(TUBELESS / TUBE-TYPE)

3.50-10, 90/100-10, 3.00-17
100/90-17, 2.75-18, 3.00-18
100/90-18, 3.25-19, 3.50-19



R-7
(TUBELESS)

3.50-10, 90/100-10, 3.00-17
100/90-17, 2.75-18, 3.00-18
100/90-18



R-8
(TUBELESS / TUBE-TYPE)

3.00-17, 2.75-18, 3.00-18



R-9
(TUBELESS)

90/100-10, 3.00-17,
2.75-18, 3.00-18



SW-555
(TUBE-TYPE)

3.00-17, 3.00-18



AVANTI
(TUBE-TYPE)

3.50-10



CITY STAR
(TUBE-TYPE)

3.00-12, 90/90-12



JZ-101
(TUBE-TYPE)

2.75-10, 3.00-10



SW-101
(TUBE-TYPE)

3.50-8, 3.50-10



SW-601
(TUBE-TYPE)

3.50-10

BUTYL INNER TUBES & FLAPS

TUBES FOR TWO / THREE WHEELER



SIZE VALVE

3.50-8	A 40 2 45 / V1.08.3
4.00-8	A 40 2 45 / V1.08.3
90/100-10	A 47 2 45 / V1.08.1
100/90-10	A 47 2 45 / V1.08.1
2.50-10	A 47 2 45 / V1.08.1
2.75-10	A 47 2 45 / V1.08.1
3.50-10	A 47 2 45 / V1.08.1
4.00-10	A 47 2 45 / V1.08.1
4.50-10	A 40 2 45 / V1.08.3
5.00-10	TR-13 / B 35 3 57 / V2.01.1
3.00-12	TR-13 / B 35 3 57 / V2.01.1
3.75-12	A 47 2 45 / V1.08.1
90/90-12	A 47 2 45 / V1.08.1
110/90-12	A 47 2 45 / V1.08.1
100/80-12	A 29 1 45 / V1.09.2 / TR-29
110/80-12	A 29 1 45 / V1.09.2 / TR-29
2.75/3.00-14	A 29 1 45 / V1.09.2 / TR-29
2.00/2.25-16	A 29 1 45 / V1.09.2 / TR-29
2.50/2.75-16	A 29 1 45 / V1.09.2 / TR-29
3.00-16	A 29 1 45 / V1.09.2 / TR-29
3.25-16	A 29 1 45 / V1.09.2 / TR-29
3.50-16	A 29 1 45 / V1.09.2 / TR-29
2.00/2.25-17	A 29 1 45 / V1.09.2 / TR-29
2.50-17	A 29 1 45 / V1.09.2 / TR-29
2.75/3.00-17	A 29 1 45 / V1.09.2 / TR-29
90/90-17	A 29 1 45 / V1.09.2 / TR-29

SIZE VALVE

70/100-17	A 29 1 45 / V1.09.2 / TR-29
100/90-17	A 29 1 45 / V1.09.2 / TR-29
120/80-17	A 29 1 45 / V1.09.2 / TR-29
2.25/2.50-18	A 29 1 45 / V1.09.2 / TR-29
2.75/3.00-18	A 29 1 45 / V1.09.2 / TR-29
4.10/4.60/4.75-18	A 29 1 45 / V1.09.2 / TR-29
90/90-18	A 29 1 45 / V1.09.2 / TR-29
100/90-18	A 29 1 45 / V1.09.2 / TR-29
110/90-18	A 29 1 45 / V1.09.2 / TR-29
110/80-18	A 29 1 45 / V1.09.2 / TR-29
110/70-18	V1.09.1 / V1.08.1
120/70-18	V1.09.1 / V1.08.1
130/70-18	V1.09.1 / V1.08.1
130/60-18	V1.09.1 / V1.08.1 / TR-29
4.00/4.10-18	V1.09.1 / V1.08.1
2.75/3.00-19	A 29 1 45 / V1.09.2 / TR-29
3.25/3.50-19	A 29 1 45 / V1.09.2 / TR-29
110/90-19	A 29 1 45 / V1.09.2 / TR-29
120/90-19	V1.09.1 / V1.08.1 / TR-29
110/80-19	V1.09.1 / V1.08.1 / TR-29
120/80-19	V1.09.1 / V1.08.1 / TR-29
130/70-19	V1.09.1 / V1.08.1 / TR-29
300/3.25-21	V1.09.1 / V1.08.1 / TR-29
80/100-21	V1.09.1 / V1.08.1 / TR-29
90/100-21	V1.09.1 / V1.08.1 / TR-29
2.75/3.00-23	V1.09.1 / V1.08.1 / TR-29

TUBES FOR AGRICULTURE EQUIPMENTS & OTR VEHICLES



SIZE VALVE

3.50-6	TR-13 / B 35 3 57 / V2.01.1
3.50-8	TR-13 / B 35 3 57 / V2.01.1
4.00-8	TR-13 / B 35 3 57 / V2.01.1
4.00-10	TR-13 / B 35 3 57 / V2.01.1
4.50-10	TR-13 / B 35 3 57 / V2.01.1
5.00-10	TR-13 / B 35 3 57 / V2.01.1
5.00-12	TR-13 / B 35 3 57 / V2.01.1
6.00-12	TR-13 / B 35 3 57 / V2.01.1
7.00-12	TR-13 / B 35 3 57 / V2.01.1
10.0/80-12	TR-13 / B 35 3 57 / V2.01.1
200/60-14.5	TR-13 / B 35 3 57 / V2.01.1
10.0/75-15.3	TR-13 / B 35 3 57 / V2.01.1
11.5/80-15.3	TR-13 / B 35 3 57 / V2.01.1

SIZE VALVE

4.00-16	TR-15 / B 35 5 57 / V2.01.2
4.50-16	TR-15 / B 35 5 57 / V2.01.2
5.00-16	TR-15 / B 35 5 57 / V2.01.2
5.50-16	TR-15 / B 35 5 57 / V2.01.2
6.00-16	TR-15 / B 35 5 57 / V2.01.2
6.00-16	TR-15 / B 35 5 57 / V2.01.2
6.50-16	TR-15 / B 35 5 57 / V2.01.2
7.00-16	TR-15 / B 35 5 57 / V2.01.2
7.00-16	TR-218A / B 20 5 63 / V4.01.1
7.50-16	TR-15 / B 35 5 57 / V2.01.2
7.50-16	TR-218A / B 20 5 63 / V4.01.1
8.25-16	TR-15 / B 35 5 57 / V2.01.2
8.25-16	TR-218A / B 20 5 63 / V4.01.1



TUBES FOR AGRICULTURE EQUIPMENTS & OTR VEHICLES

SIZE	VALVE
9.00-16	TR-15 / B 35 5 57 / V2.01.2
9.00-16	TR-218A / B 20 5 63 / V4.01.1
10.00-16	TR-15 / B 35 5 57 / V2.01.2
10.00-16	TR-218A / B 20 5 63 / V4.01.1
10.5-16	TR-15 / B 35 5 57 / V2.01.2
10.5-16	TR-218A / B 20 5 63 / V4.01.1
10.5/65-16	TR-15 / B 35 5 57 / V2.01.2
10.5/65-16	TR-218A / B 20 5 63 / V4.01.1
9.0/70-16	TR-15 / B 35 5 57 / V2.01.2
9.0/70-16	TR-218A / B 20 5 63 / V4.01.1
9.0/75-16	TR-15 / B 35 5 57 / V2.01.2
9.0/75-16	TR-218A / B 20 5 63 / V4.01.1
250/80-16	TR-15 / B 35 5 57 / V2.01.2
250/80-16	TR-218A / B 20 5 63 / V4.01.1
280/70-16	TR-15 / B 35 5 57 / V2.01.2
280/70-16	TR-218A / B 20 5 63 / V4.01.1
10-16.5	TR-15 / B 35 5 57 / V2.01.2
10-16.5	TR-218A / B 20 5 63 / V4.01.1
12-16.5	TR-15 / B 35 5 57 / V2.01.2
12-16.5	TR-218A / B 20 5 63 / V4.01.1
6.00-18	TR-15 / B 35 5 57 / V2.01.2
6.00-18	TR-218A / B 20 5 63 / V4.01.1
7.50-18	TR-15 / B 35 5 57 / V2.01.2
7.50-18	TR-218A / B 20 5 63 / V4.01.1
12.5/80-18	TR-15 / B 35 5 57 / V2.01.2
12.5/80-18	TR-218A / B 20 5 63 / V4.01.1
13.0/65-18	TR-15 / B 35 5 57 / V2.01.2
13.0/75-18	V4.01.1 / TR-217A
14.5/80-18	V4.01.1 / TR-217A
4.50-19	TR-15 / B 35 5 57 / V2.01.2
5.00-19	TR-15 / B 35 5 57 / V2.01.2
6.00-19	TR-15 / B 35 5 57 / V2.01.2
7.00-19	TR-15 / B 35 5 57 / V2.01.2
8.00-19	TR-15 / B 35 5 57 / V2.01.2
6.00-20	TR-15 / B 35 5 57 / V2.01.2
6.50-20	TR-15 / B 35 5 57 / V2.01.2
7.00-20	TR-15 / B 35 5 57 / V2.01.2
7.50-20	TR-15 / B 35 5 57 / V2.01.2
8.00/8.3-20	TR-15 / B 35 5 57 / V2.01.2
8.00/8.3-20	TR-218A / B 20 5 63 / V4.01.1
9.50-20	TR-218A / B 20 5 63 / V4.01.1
10.00-20	TR-218A / B 20 5 63 / V4.01.1
8.3-22	TR-218A / B 20 5 63 / V4.01.1

SIZE	VALVE
9.5-22	TR-218A / B 20 5 63 / V4.01.1
8.3-24	TR-218A / B 20 5 63 / V4.01.1
9.5-24	TR-218A / B 20 5 63 / V4.01.1
11.2-24	TR-218A / B 20 5 63 / V4.01.1
12.4-24	TR-218A / B 20 5 63 / V4.01.1
13.00-24	TR-218A / B 20 5 63 / V4.01.1
13.00-24	TR-220 / B30 5 63
13.00-24	TR-179A / A G0 5 82
14.00-24	TR-179A / A G0 5 82
14.00-24	TR-218A / B 20 5 63 / V4.01.1
14.00-24	TRJ-1175 / E D4 6 32
14.00-24	TR-220 / B30 5 63
13.6-24	TR-218A / B 20 5 63 / V4.01.1
14.9-24	TR-218A / B 20 5 63 / V4.01.1
15.5/80-24	TR-218A / B 20 5 63 / V4.01.1
16.5/85-24	TR-218A / B 20 5 63 / V4.01.1
14.00-25	TR-218A / B 20 5 63 / V4.01.1
14.00-25	TR-179A / A G0 5 82
14.00-25	TRJ-1175 / E D4 6 32
14.00-25	TR-220 / B30 5 63
13.6/14.9-26	TR-218A / B 20 5 63 / V4.01.1
23.1-26	TR-218A / TR-220A
11.2-28	TR-218A / B 20 5 63 / V4.01.1
12.4-28	TR-218A / B 20 5 63 / V4.01.1
13.6-28	TR-218A / B 20 5 63 / V4.01.1
14.9-28	TR-218A / B 20 5 63 / V4.01.1
16.9-28	TR-218A / B 20 5 63 / V4.01.1
16.9-30	TR-218A / B 20 5 63 / V4.01.1
18.4-30	TR-218A / B 20 5 63 / V4.01.1
8.3-32	TR-218A / B 20 5 63 / V4.01.1
9.5-32	TR-218A / B 20 5 63 / V4.01.1
11.2-36	TR-218A / B 20 5 63 / V4.01.1
12.4-36	TR-218A / B 20 5 63 / V4.01.1
11.2-38	TR-218A / B 20 5 63 / V4.01.1
12.4-38	TR-218A / B 20 5 63 / V4.01.1
13.6-38	TR-218A / B 20 5 63 / V4.01.1
14.00-38	TR-218A / B 20 5 63 / V4.01.1
14.9-38	TR-218A / B 20 5 63 / V4.01.1
15.5-38	TR-218A / B 20 5 63 / V4.01.1
16.9-38	TR-218A / B 20 5 63 / V4.01.1
18.4-38	TR-218A / B 20 5 63 / V4.01.1
20.8-38	TR-218A / B 20 5 63 / V4.01.1



TUBES FOR BUSES, LIGHT & HEAVY TRUCKS

SIZE	VALVE
6.50-15	TR-15 / B 35 5 57 / V2.01.2
6.70-15	TR-15 / B 35 5 57 / V2.01.2
7.00-15	TR-15 / B 35 5 57 / V2.01.2
7.50-15	TR-15 / B 35 5 57 / V2.01.2
8.15-15	TR-15 / B 35 5 57 / V2.01.2
8.25-15	TR-15 / B 35 5 57 / V2.01.2
8.25-15	AB 15 82
6.00-16	TR-15 / B 35 5 57 / V2.01.2
6.50-16	TR-15 / B 35 5 57 / V2.01.2
7.50-16	AB 15 82
8.25-16	TR-77A / A C3 5 82 / V3.09.16
9.00-16	TR-77A / A C3 5 82 / V3.09.16
10.00-16	V3.09.13 / TR-177A
12.00-18	V3.02.8
13.00-18	V3.02.8
6.50-20	TR-78A / A E7 5 82 / V3.09.18

SIZE	VALVE
7.50-20	TR-78A / A E7 5 82 / V3.09.18
8.25-20	TR-175A / A D4 5 82 / V3.09.17
9.00-20	TR-175A / A D4 5 82 / V3.09.17
9.00R-20	TR-175A / A D4 5 82 / V3.09.17
10.00-20	TR-78A / A E7 5 82 / V3.09.18
10.00R-20	TR-78A / A E7 5 82 / V3.09.18
11.00-20	TR-78A / A E7 5 82 / V3.09.18
11.00R-20	TR-78A / A E7 5 82 / V3.09.18
12.00-20	TR-78A / A E7 5 82 / V3.09.18
12.00R-20	TR-78A / A E7 5 82 / V3.09.18
12.00-24	TR-78A / A E7 5 82 / V3.09.18
12.00R-24	TR-78A / A E7 5 82 / V3.09.18
13.00-24	TR-179A
14.00-24	TRJ-1175C
14.00-25	TRJ-1175C
18.00-25	TRJ-1175C

TUBES FOR UTILITY VEHICLES



SIZE	VALVE
145-10	TR-13 / B 35 3 57 / V2.01.1
5.00-10	TR-13 / B 35 3 57 / V2.01.1
4.50-12	TR-13 / B 35 3 57 / V2.01.1
5.00-12	TR-13 / B 35 3 57 / V2.01.1
145/80D-12	TR-13 / B 35 3 57 / V2.01.1
155/80D-12	TR-13 / B 35 3 57 / V2.01.1

SIZE	VALVE
155/80R-12	TR-13 / B 35 3 57 / V2.01.1
165/70R-13	TR-13 / B 35 3 57 / V2.01.1
165/70-13	TR-13 / B 35 3 57 / V2.01.1
165/175/70-14	TR-13 / B 35 3 57 / V2.01.1
195/205R-14	TR-13 / B 35 3 57 / V2.01.1
185R-16	TR-13 / B 35 3 57 / V2.01.1

TUBES FOR LAWN & GARDEN VEHICLES



SIZE	VALVE
2.50/2.80-4	TR-87
3.00-4	TR-87
4.00-4	TR-87
4.10/3.50-5	TR-13
11x4.00-5	TR-13
11x6.00-5	TR-87
3.50/4.00-6	TR-87
13x.5.00-6	TR-87

SIZE	VALVE
15x.6.00-6	TR-13
3.50-7	TR-13
4.00-7	TR-13
3.00/3.25-8	TR-13
3.50-8	TR-13
145/70-8	TR-13
16x6.50-8	TR-13
18x8.50-8	TR-13



TUBES FOR INDUSTRIAL & LIFT TRUCK TUBES (FORKLIFT)

SIZE VALVE

4.00-8	TR-87
4.00-8	JS-2
5.00-8	JS-2
5.00-8	TR-87
5.00-10	JS-2
5.00-10	TR-13
5.00-10	JS-2
6.50-10	TR-15
6.50-10	JS-2
6.50-10	TR-75A
7.00-12	TR-75A
7.00-12	JS-2
23X5	TR-87
23X5	JS-2
2.15-15	V3.06.18
2.15-15	JS-2

SIZE VALVE

7.00-15	TR-78A
7.00-15	JS-2
7.50-15	TR-75A
7.50-15	JS-2
8.15-15	TR-75A
8.15-15	JS-2
8.25-15	TR-15 / B 35 5 57 / V2.01.2
8.25-15	JS-2
250-15	JS-2
250-15	V3.02.18
300-15	TR-78A
300-15	JS-2
9.00-20	V3.04.5 / TR-78A / TR-177A
10.00-20	V3.04.5 / TR-78A / TR-177A
11.00-20	V3.04.5 / TR-78A / TR-177A
12.00-20	V3.04.5 / TR-78A / TR-177A

TUBES FOR PASSENGER CARS



SIZE VALVE

145-10	TR-13 / B 35 3 57 / V2.01.1
125/135-12	TR-13 / B 35 3 57 / V2.01.1
125/135-12	TR-13 / B 35 3 57 / V2.01.1
145/70R-12	TR-13 / B 35 3 57 / V2.01.1
155/80D-12	TR-13 / B 35 3 57 / V2.01.1
155/80R-12	TR-13 / B 35 3 57 / V2.01.1
135/70R-13	TR-13 / B 35 3 57 / V2.01.1
145/70R-13	B 46 3 57
145/70R-13	TR-13 / B 46 3 57 / V2.01.1
165/65R-13	TR-13 / B 35 3 57 / V2.01.1
175/80R-13	TR-13 / B 35 3 57 / V2.01.1
135/70R-13	TR-13 / B 35 3 57 / V2.01.1
145R/70-13	TR-13 / B 35 3 57 / V2.01.1
155/70R-13	TR-13 / B 35 3 57 / V2.01.1
165/70R-13	TR-13 / B 35 3 57 / V2.01.1
175/70R-13	TR-13 / B 35 3 57 / V2.01.1
6.00/6.50-13	TR-13 / B 35 3 57 / V2.01.1
4.00/4.50-14	TR-13 / B 35 3 57 / V2.01.1
165/175/70R-14	TR-13 / B 35 3 57 / V2.01.1
175/185R-14	TR-13 / B 35 3 57 / V2.01.1
195/205R-14	TR-13 / B 35 3 57 / V2.01.1

SIZE VALVE

165/175/65R-14	TR-13 / B 35 3 57 / V2.01.1
165/175/70R-14	TR-13 / B 35 3 57 / V2.01.1
185/70R-14	TR-13 / B 35 3 57 / V2.01.1
125-15	TR-13 / B 35 3 57 / V2.01.1
4.00/4.50-15	TR-13 / B 35 3 57 / V2.01.1
5.00-15	TR-13 / B 35 3 57 / V2.01.1
5.90-15	TR-13 / B 35 3 57 / V2.01.1
F78-15	TR-13 / B 35 3 57 / V2.01.1
175/185R-15	TR-13 / B 35 3 57 / V2.01.1
165/175/70R-15	TR-13 / B 35 3 57 / V2.01.1
175/185/70R-15	TR-13 / B 35 3 57 / V2.01.1
175/185/70R-15	TR-13 / B 35 3 57 / V2.01.1
195/205R-15	TR-13 / B 35 3 57 / V2.01.1
215/225/235/70R-15	TR-13 / B 35 3 57 / V2.01.1
235/75R15	TR-13 / B 35 3 57 / V2.01.1
225/70R15	TR-13 / B 35 3 57 / V2.01.1
255/70R15	TR-13 / B 35 3 57 / V2.01.1
175/185R-16	TR-13 / B 35 3 57 / V2.01.1
195/205/215/70R-16	TR-13 / B 35 3 57 / V2.01.1
195/205/215/70R-16	TR-13 / B 35 3 57 / V2.01.1



TUBES FOR IMPLEMENT & TRAILERS

SIZE

VALVE

6.70-15	TR-15 / B 35 5 57 / V2.01.2
7.60-15	TR-15 / B 35 5 57 / V2.01.2, TR-75A A97 5 82 / V3.09.13 TR
9.5L-15	TR-75 A / A97 5 82 / V3.09.13 TR
11L-15	TR-15 / B 35 5 57 \ V2.01.2, TR-218A / B20 5 63 \ V4.01.1
12.5L-15	TR-15 / B 35 5 57 \ V2.01.2, TR-218A / B20 5 63 \ V4.01.1

SIZE

VALVE

10.0/75-15.3	TR-15 / B 35 5 57 \ V2.01.2, TR-218A / B20 5 63 \ V4.01.1
11.5/80-15.3	TR-15 / B 35 5 57 \ V2.01.2, TR-218A / B20 5 63 \ V4.01.1
11L.16	TR-15 / B 35 5 57 / V2.01.2, TR - 75A / A97 5 82 V3.09.13 TR, TR-77A / AC3 5 82 / V3.09.16
12.5L-16	TR-15 / B 35 5 57 / V2.01.2



FLAPS

SIZE

5.00-8
6.00-9
6.50-10
7.00-12
8.25-15
6.00-16
6.50-16
7.00-16
7.50-16
8.25-16
9.00-16

SIZE

7.50-20
8.25-20
9.00-20
10.00-20
11.00-20
12.00-20
12.00-24
13.00-24
14.00-24
14.00-25
17.5-25 / 18.00-25 (Under Development)

Notes



"A customer is the most important visitor on our premises. He is not dependent on us. We are dependent on him. He is not an interruption in our work. He is the purpose of it. He is not an outsider to our business. He is part of it. We are not doing him a favour by serving him. He is doing us a favour by giving us an opportunity to do so."

- Mahatma Gandhi

SPEEDWAYS RUBBER COMPANY

Suchi Pind, By Pass, G.T. Road
Jalandhar-144009
(INDIA)



: **+91-99880-45000**

e-mail

: **sales@speedwaystyres.com**

Website

: **www.speedwaystyres.com**